


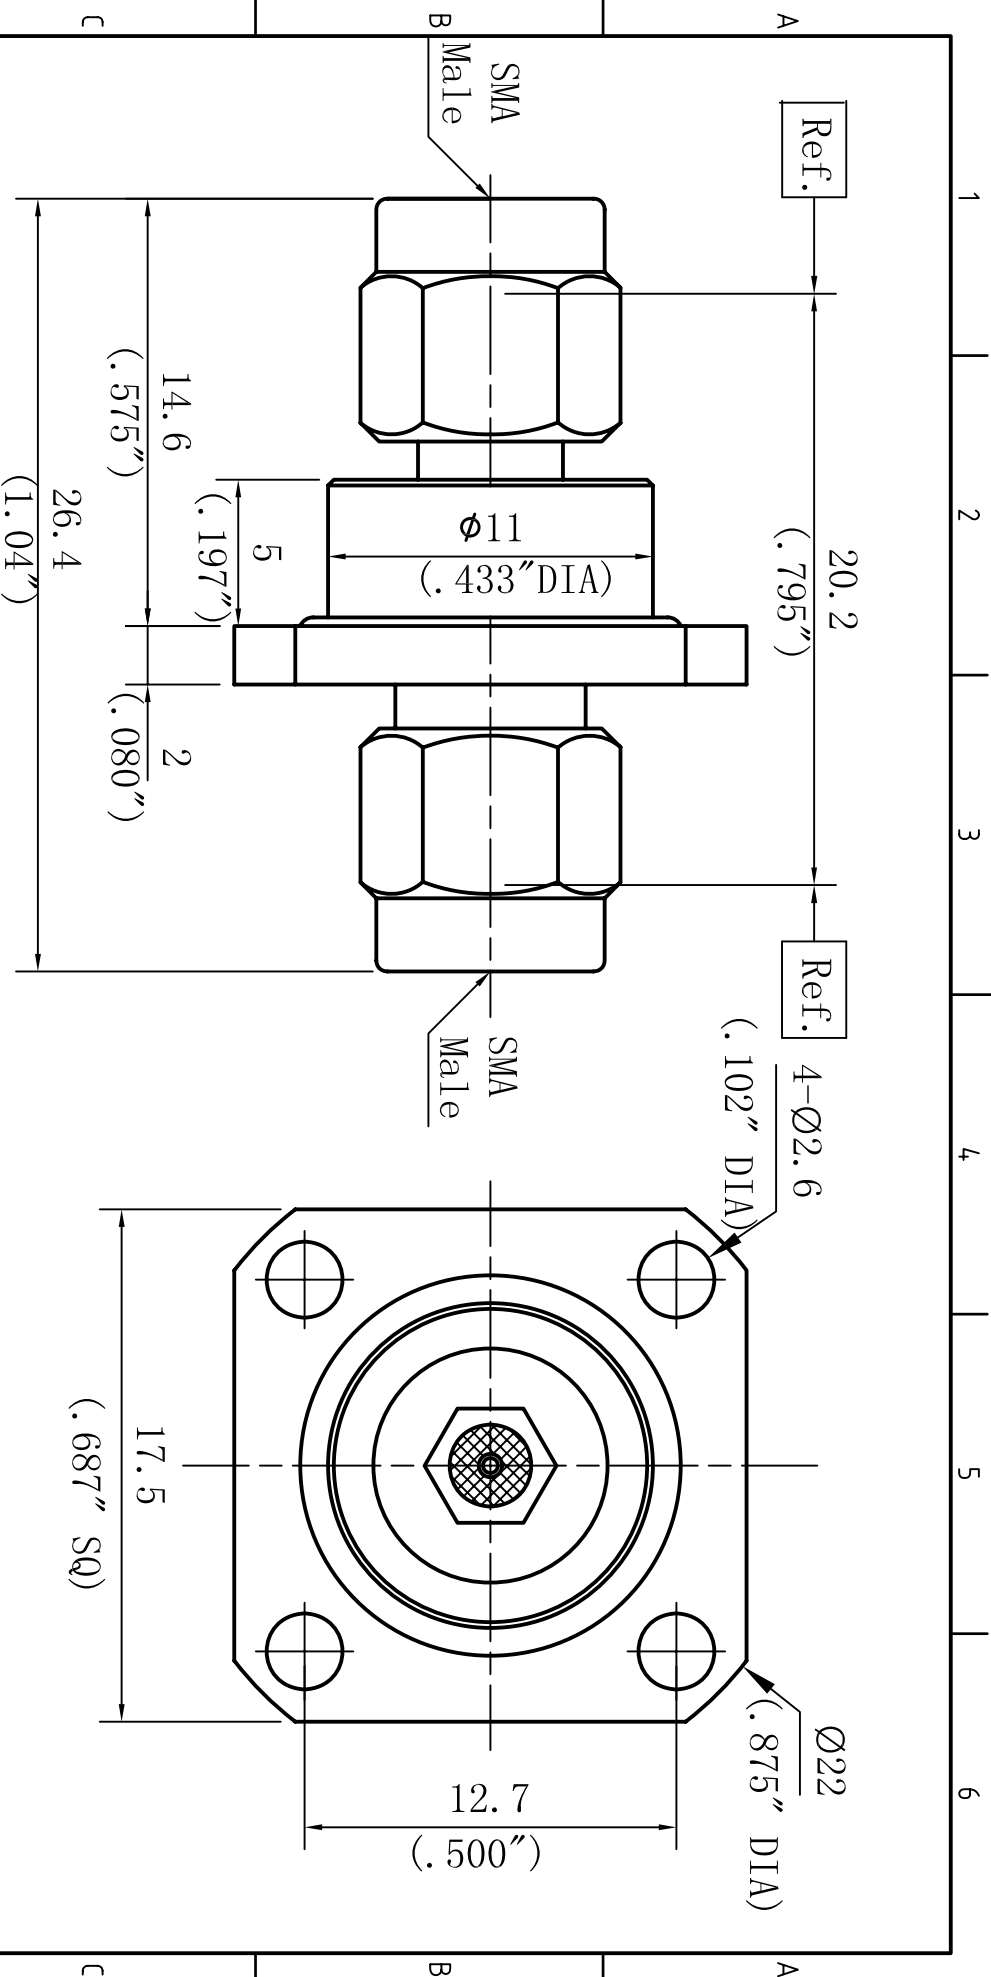

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-27GHz
VSWR: DC-27GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI&PTFE



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN	Min Zhou
CHECKED	Shaoging Du
APPR.	Gang Cao

1. DRAWING ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED.
2. DIMENSIONS ON COMMON CENTERS TO BE CONSIDERED WITHIN 0.1
3. DIMENSIONS ON COMMON CENTERS TO BE CONSIDERED WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED.

LTR DESCRIPTION

DATE

APPR.

DO NOT SCALE DRAWING

DWG NO.

Z555511FS09A

OUTLINE DRAWING

SIZE A4-h

SCALE:2:1

REV. V2.0

SHEET1/1