


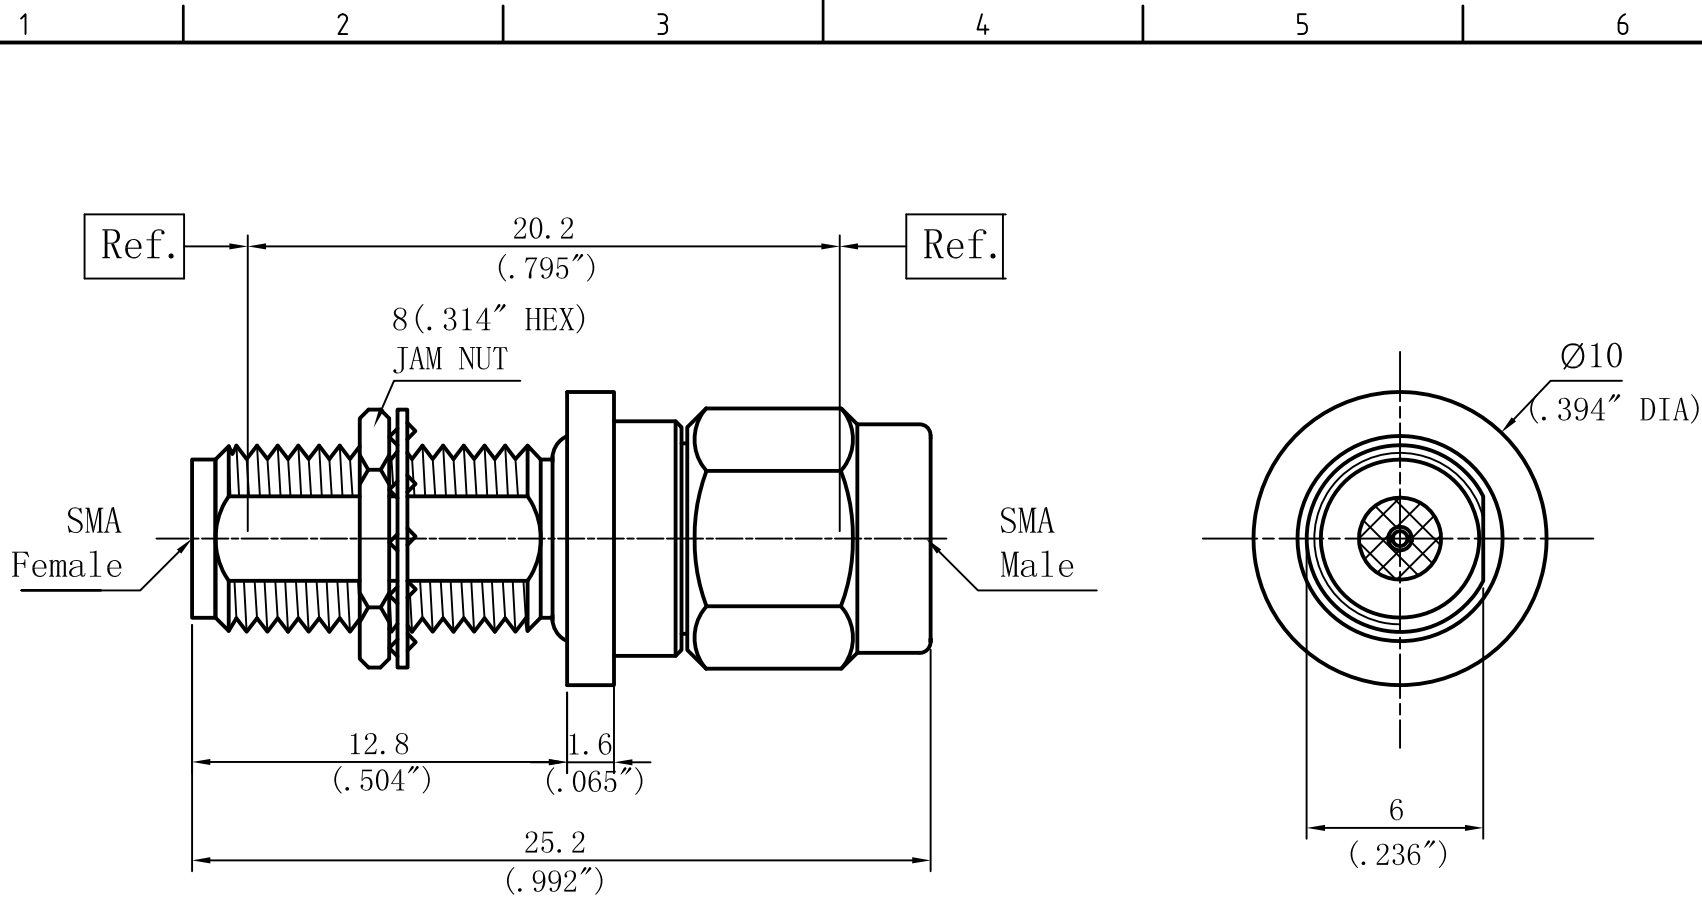

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-27GHz
VSWR: DC-27GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALLWINTEK.COM

DIRECTION OF VIEW



UNIT

mm

TITLE

SMA-SMA Adapter

DWG NO.

Z555510YS01

OUTLINE DRAWING

PROPRIETARY INFORMATION: THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DRAWN Shaoqing Du

CHECKED Haimin Zhang

APPR. Gang Cao

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ± 0.1 , ANGLE TOLERANCES $\pm 1^\circ$
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

LTR	DESCRIPTION	DATE	APPR.

DO NOT SCALE DRAWING

SIZE A4_h

SCALE 4: 1

REV. V2.0

SHEET 1/1