


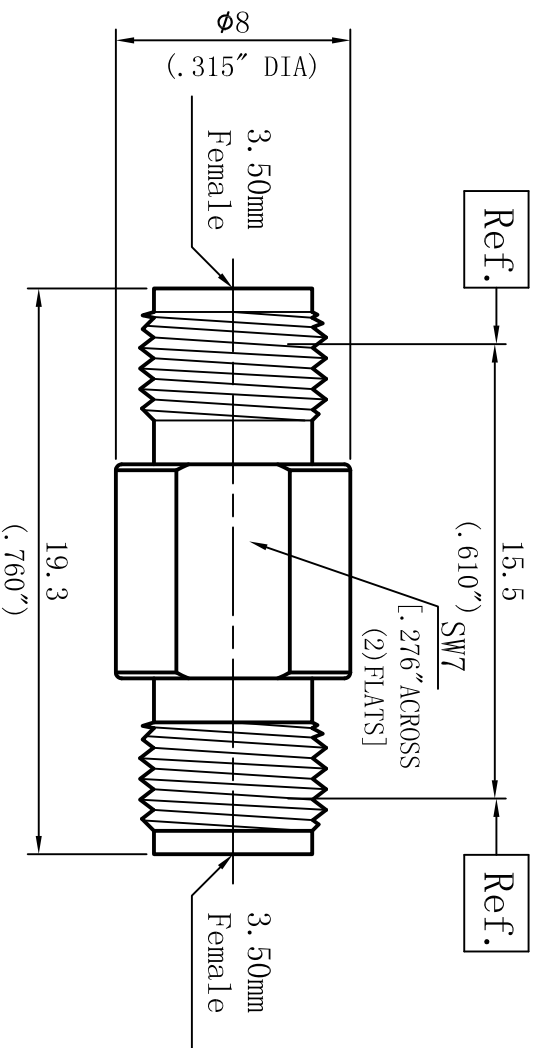

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-33GHz
VSWR: DC-33GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Innovation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304980
FAX: 025-84304989
WWW.ALVINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIN TECHNOLOGY.



UNIT
mm

TITLE
3.5mm Adapter

DWG NO.
Z353500Z01

OUTLINE DRAWING

APPR.	Shaoqing Du	DRAWN
CHECKED	Haimin Zhang	
APPR.	Gang Cao	

1. REMOVE ALL BORDERS, BREAK ALL CORNERS, SHARP EDGES 0.40 X 0.40 MM
2. DIMENSIONS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: $\sqrt{1}$
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: $\sqrt{1}$

DO NOT SCALE DRAWING

SIZE A4-h SCALE: 4:1 REV. V2.0 SHEET 1/1