


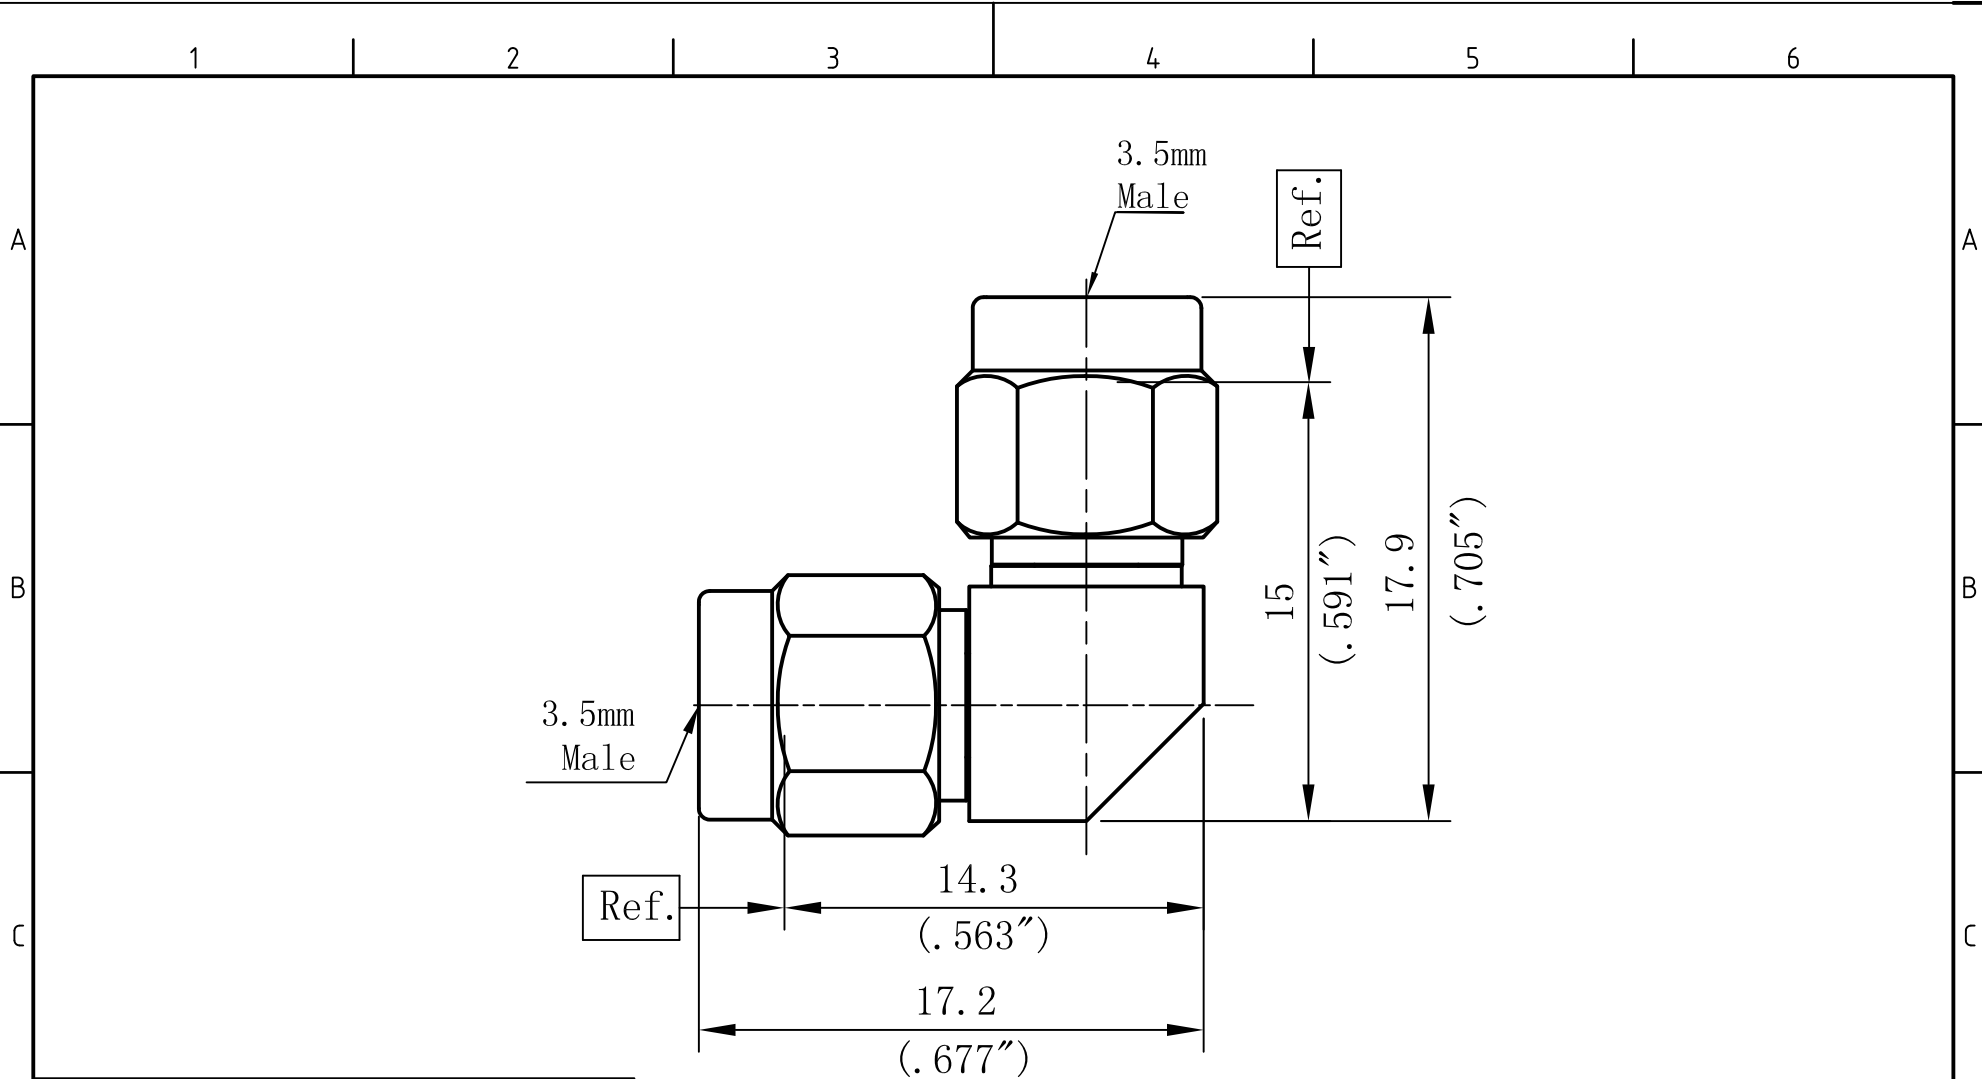

#### Performance Features:

Nominal Impedance: 50Ω  
Frequency Range: DC-33GHz  
VSWR: DC-33GHz.... 1.25:1 (Max)

#### Materials/Finishes:

Housing: SU303F  
Polished & Passivated  
Center Contact: Beryllium Copper  
Gold Plated  
Insulators:PEI



4th Floor, West Unit,  
Incubation Building 1  
Guanghua Lu, Nanjing  
TEL:025-84304950  
FAX:025-84304959  
WWW.ALLWINTEK.COM

#### DIRECTION OF VIEW



#### UNIT

mm

#### TITLE

3.5mm Adapter

PROPRIETARY INFORMATION: THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DRAWN Weihaio Pan

CHECKED Shaoqing Du

APPR. Gang Cao

UNLESS OTHERWISE SPECIFIED:  
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX  
2. LINEARITY TOLERANCES ±0.1, ANGLE TOLERANCES ±1°  
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1  
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED ✓

DWG NO.

Z353511W01

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR.

DO NOT SCALE DRAWING

SIZE A4 h

SCALE4:1

REV. V2.0

SHEET1/1