

1 2 3 4 5 6

A

A

B


B

C

C

D

D

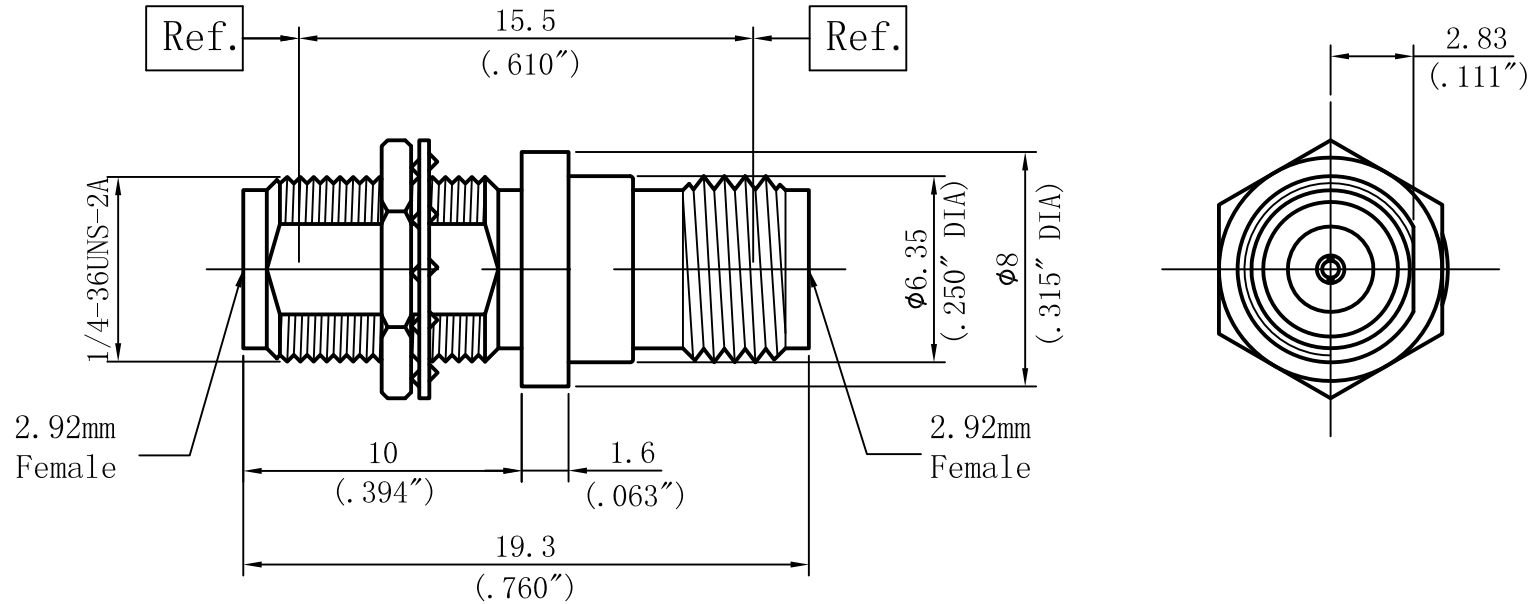

Performance Features:

Nominal Impedance: 50 Ω
 Frequency Range: DC-40GHz
 VSWR: DC-40GHz.... 1.20:1 (Max)

Materials/Finishes:

Housing: SU303F
 Polished & Passivated
 Center Contact: Beryllium Copper
 Gold Plated
 Insulators: PEI



4th Floor, West Unit,
 Incubation Building 1
 Guanghua Lu, Nanjing
 TEL: 025-84304950
 FAX: 025-84304959
 WWW.ALLWINTEK.COM

DIRECTION OF VIEW



UNIT

mm

TITLE

2.92mm Adapter

PROPRIETARY INFORMATION. THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DRAWN: Shaoping Du
 CHECKED: Haimin Zhang
 APPR.: Gang Cao

DWG NO.

Z363600Y01

UNLESS OTHERWISE SPECIFIED
 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
 2. LINEARITY TOLERANCES ± 0.1 , ANGLE TOLERANCES $\pm 1^\circ$
 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

OUTLINE DRAWING

LTR	DESCRIPTION	DATE	APPR.

DO NOT SCALE DRAWING

SIZE A4_h	SCALE 4:1	REV. V2.0	SHEET 1/1
-----------	-----------	-----------	-----------

1 2 3 4 5 6