


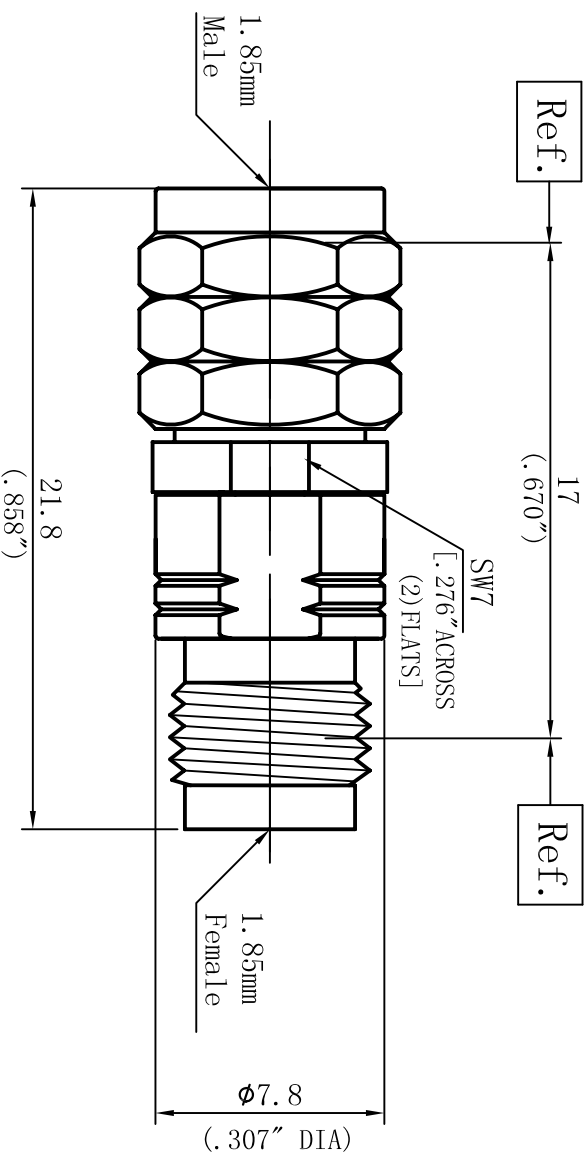

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-65GHz
VSWR: DC-65GHz.... 1.25:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PBI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALIVINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALIVIN TECHNOLOGY.



UNIT
mm

TITLE
1.85mm Adapter

DRAWN Shaoqing Du

DWG NO.

CHECKED Haimin Zhang

Z383810Z01

APPR. Gang Cao

1. REMOVE ALL DIMENSIONS SPECIFIED.
2. DIMENSIONS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

OUTLINE DRAWING

LTR DESCRIPTION

DATE

APPR.

DO NOT SCALE DRAWING

SIZE A4-h

SCALE: 4:1

REV.

V2.0

SHEET 1/1