


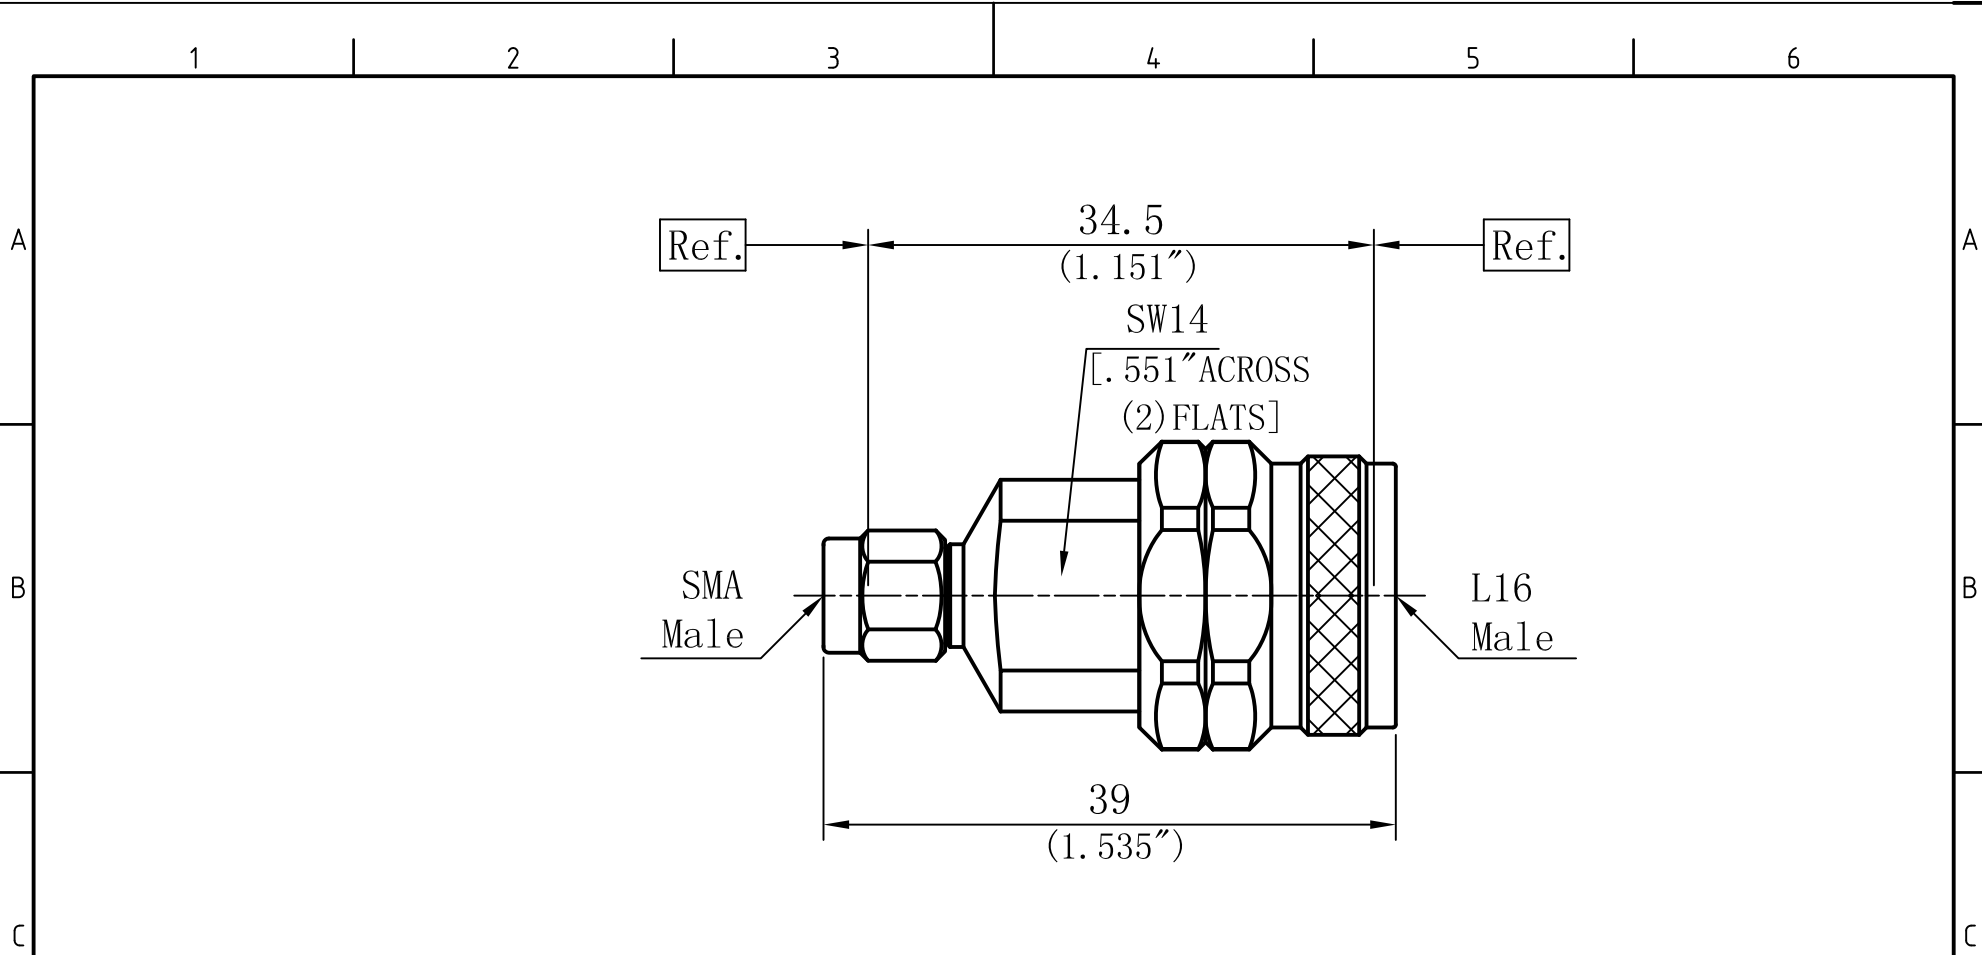

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI&PTFE

 4th Floor, West Unit, Incubation Building 1 Guanghua Lu, Nanjing TEL: 025-84304950 FAX: 025-84304959 WWW.ALLWINTeK.COM				DIRECTION OF VIEW 				UNIT mm		TITLE L16-SMA Adapter									
PROPRIETARY INFORMATION: THE INFORMATION WHEN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.								DRAWN Shaoqing Du		DWG NO. Z315511Z01									
								CHECKED Haimin Zhang											
								APPR. Gang Cao											
								UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX 2. LINEARITY TOLERANCES ± 0.1, ANGLE TOLERANCES $\pm 1^\circ$ 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED ✓											
LTR		DESCRIPTION		DATE		APPR.		DO NOT SCALE DRAWING				SIZE A4_h		SCALE 4:1		REV. V2.0		SHEET 1/1	
												5				6			