


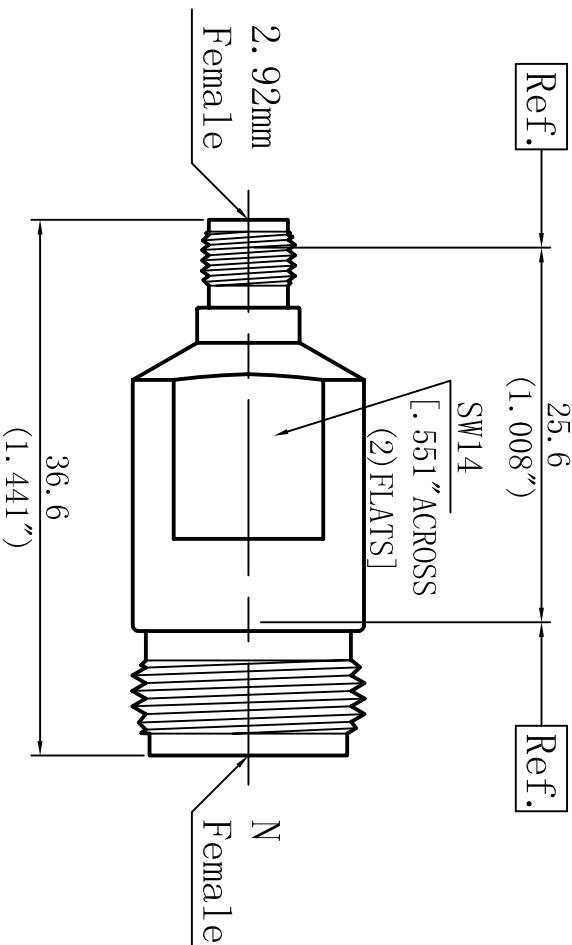

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALVINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIN TECHNOLOGY.



DIRECTION OF VIEW

UNIT
mm

TITLE
N-2.92mm Adapter

DWG NO.
Z343600Z01

DRAWN
Shaoqing Du

CHECKED
Haimin Zhang

APPR.
Gang Cao

DO NOT SCALE DRAWING

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR.

SIZE A4-h

SCALE: 4:1

REV.

V2.0

SHEET 1 / 1