


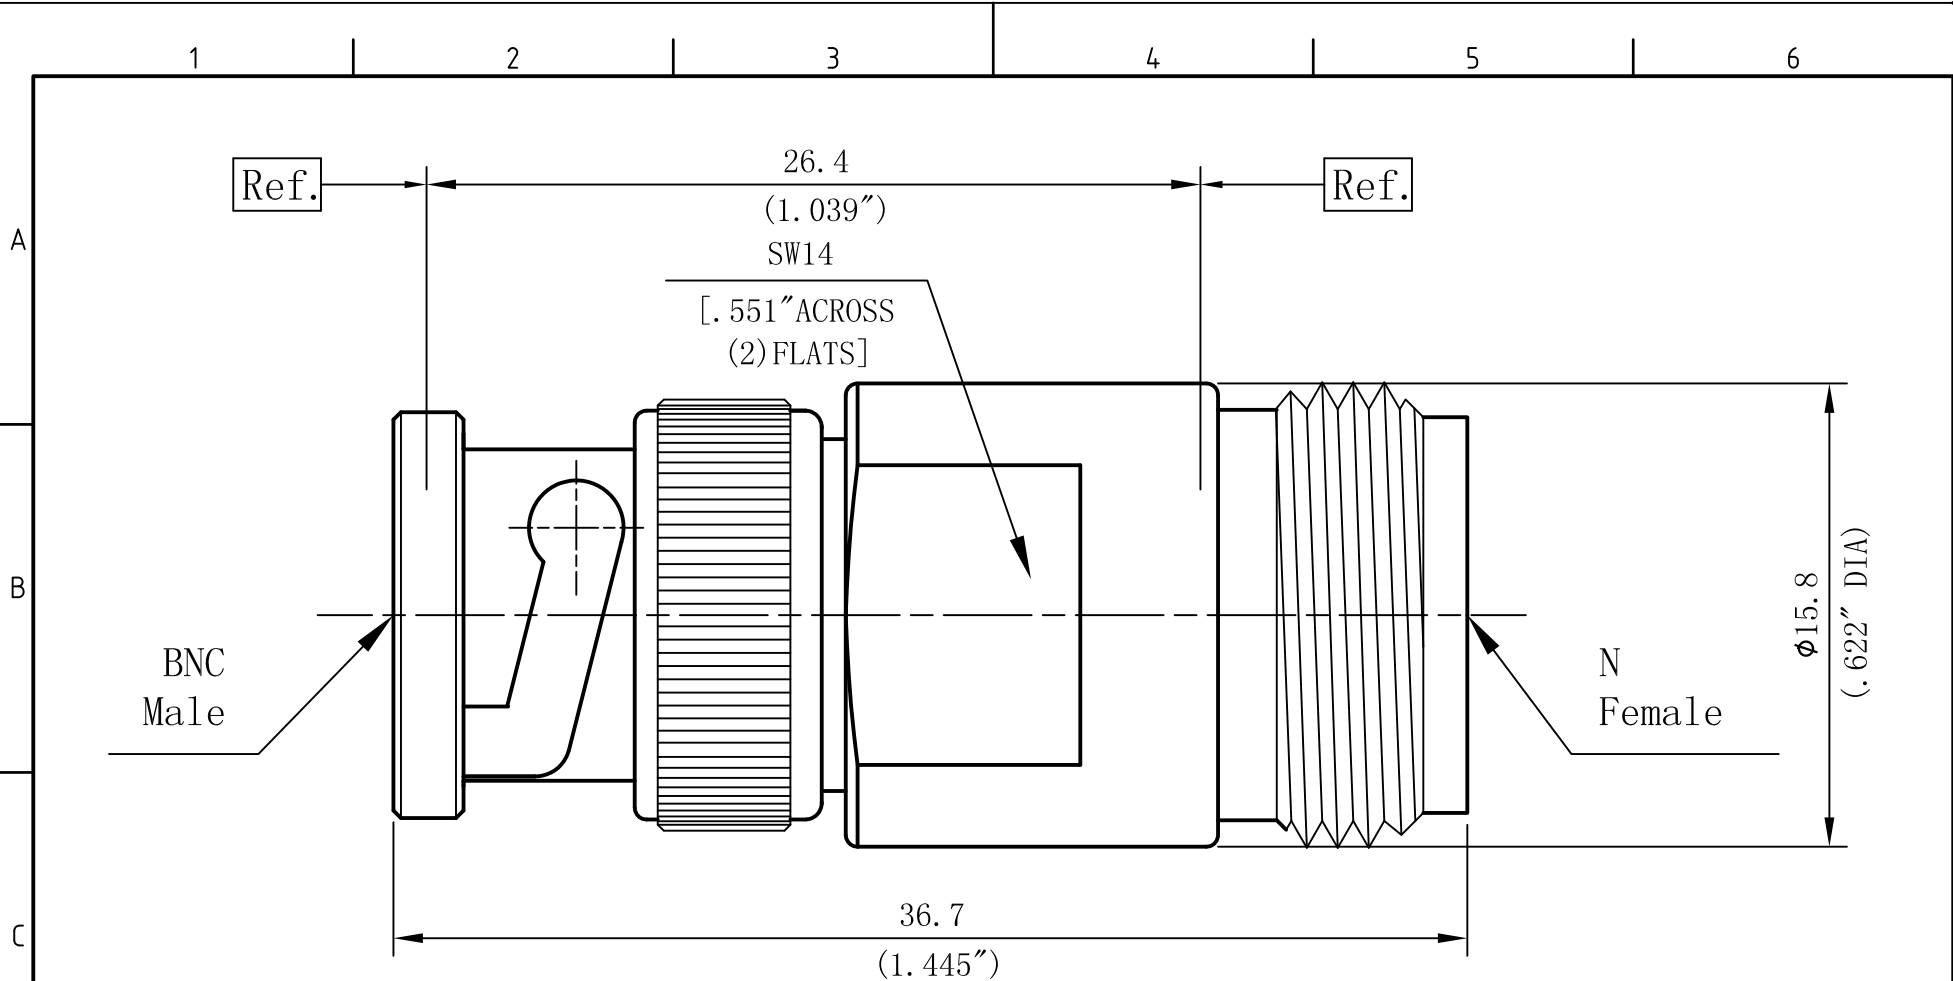

Performance Features:			
Nominal Impedance: 50Ω			
Frequency Range: DC-8GHz			
VSWR: DC-8GHz... 1.15:1 (Max)			
Materials/Finishes:			
Housing: SU303F			
Polished & Passivated			
Center Contact: Beryllium Copper			
Gold Plated			
Insulators: PEI&PTFE			
Coupling Nut: Brass			
Nickel Plated			

 4th Floor, West Unit, Incubation Building 1 Guanghua Lu, Nanjing TEL: 025-84304950 FAX: 025-84304959 WWW.ALLWINTeK.COM				DIRECTION OF VIEW 		UNIT mm		TITLE N-BNC Adapter											
PROPRIETARY INFORMATION: THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.						DRAWN		Shaoqing Du		DWG NO. Z345201Z01									
						CHECKED		Haimin Zhang											
						APPR.		Gang Cao											
						UNLESS OTHERWISE SPECIFIED 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX 2. LINEARITY TOLERANCES ±0.1, ANGLE TOLERANCES ±1° 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED ✓													
LTR		DESCRIPTION		DATE		APPR.		DO NOT SCALE DRAWING				SIZE A4_h		SCALE4: 1		REV. V1.1		SHEET1/1	
												5				6			