


1 2 3 4 5 6

A

B

C

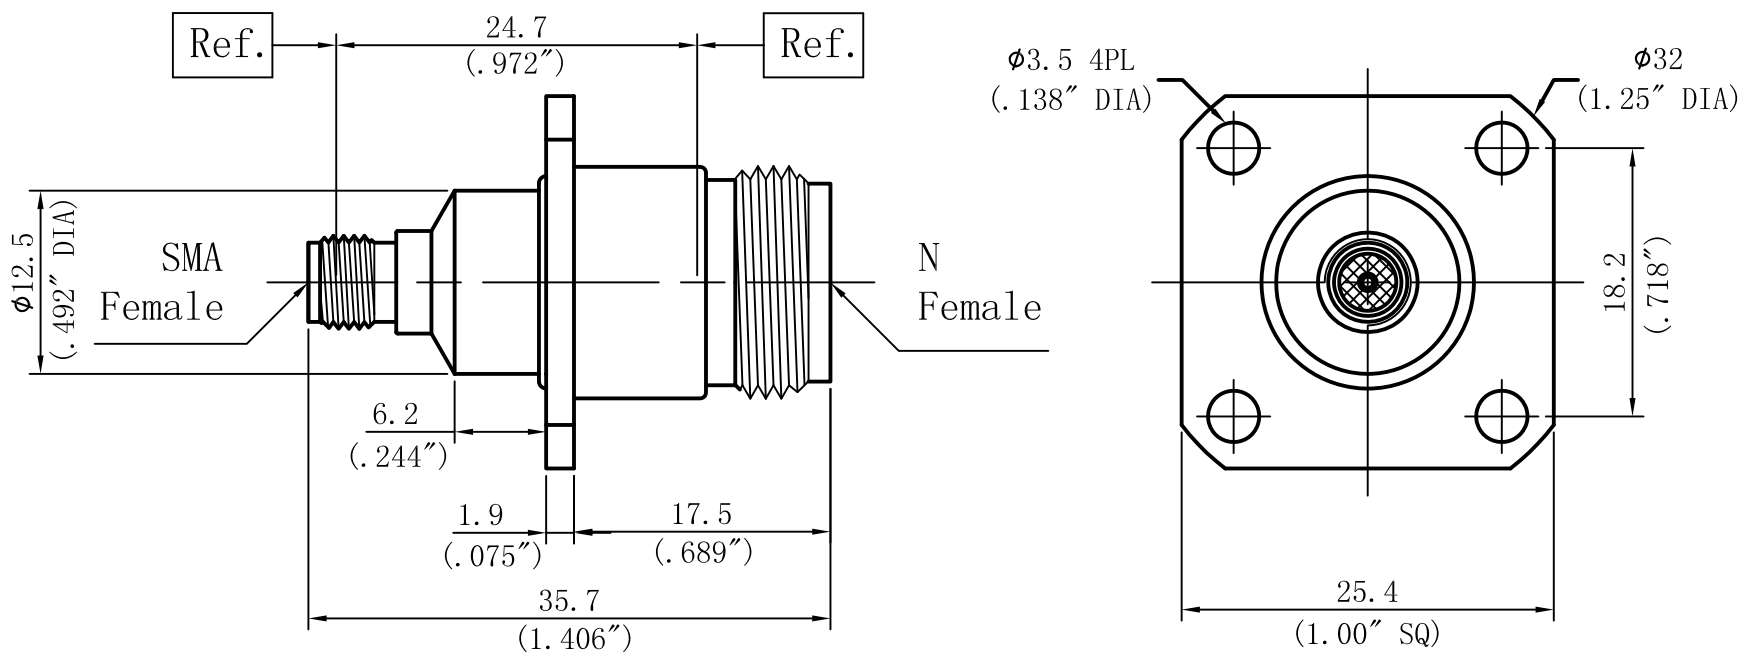

Performance Features:


Nominal Impedance: 50 Ω
 Frequency Range: DC-18GHz
 VSWR: DC-18GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
 Polished & Passivated
 Center Contact: Beryllium Copper
 Gold Plated
 Insulators: PTFE&PEI



4th Floor, West Unit,
 Incubation Building 1
 Guanghua Lu, Nanjing
 TEL:025-84304950
 FAX:025-84304959
 WWW.ALLWINTEK.COM


DIRECTION OF VIEW

 UNIT
 mm

TITLE
SMA-N Adapter

PROPRIETARY INFORMATION. THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DRAWN Shaoqing Du
 CHECKED Haimin Zhang
 APPR. Gang Cao

DWG NO.
Z345500FS10

UNLESS OTHERWISE SPECIFIED
 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
 2. LINEARITY TOLERANCES ± 0.1 ; ANGLE TOLERANCES $\pm 1^\circ$
 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED 

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR. DO NOT SCALE DRAWING SIZE A4_h SCALE 4:1 REV. V2.0 SHEET 1/1

1 2 3 4 5 6

A

B

C

D