
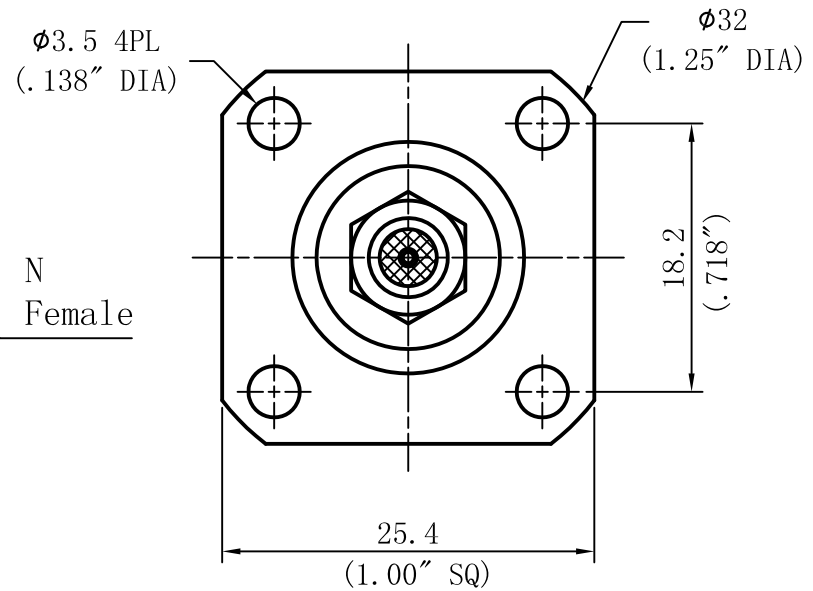


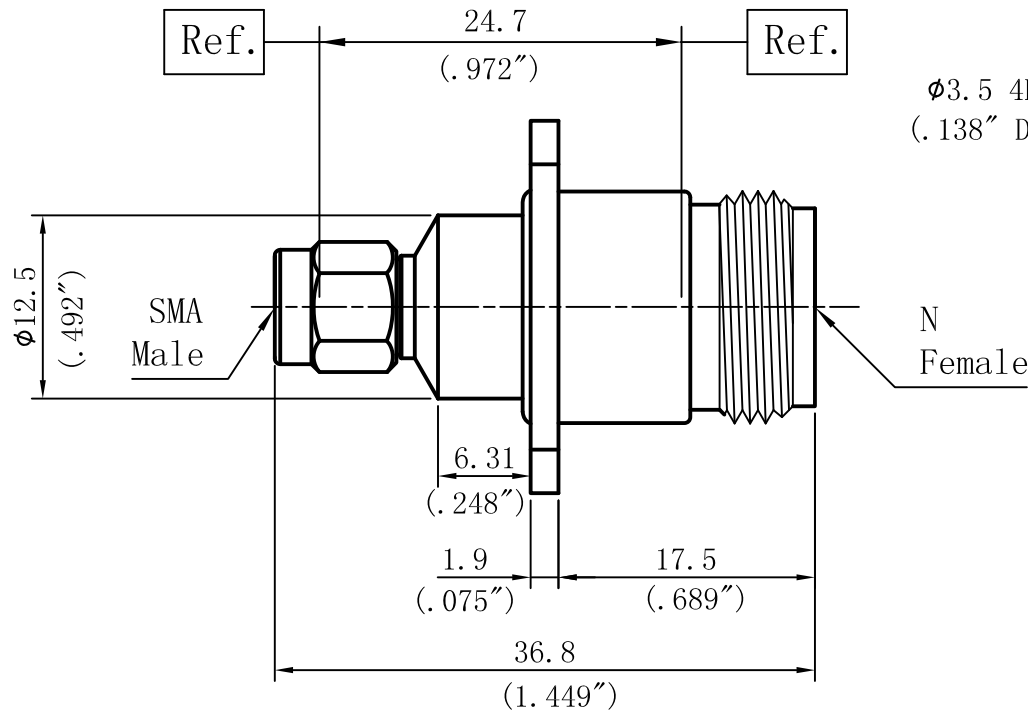

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALLWINTEK.COM

DIRECTION OF VIEW



UNIT

mm

TITLE

N-SMA Adapter

DRAWN

Xiaolu Yu

CHECKED

Shaoqing Du

APPR.

Gang Cao

UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ± 0.2 , ANGLE TOLERANCES $\pm 1^\circ$
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

DWG NO.

Z345501FS10

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR.

DO NOT SCALE DRAWING

SIZE A4_h

SCALE 4: 1

REV. V2.0

SHEET 1/1