


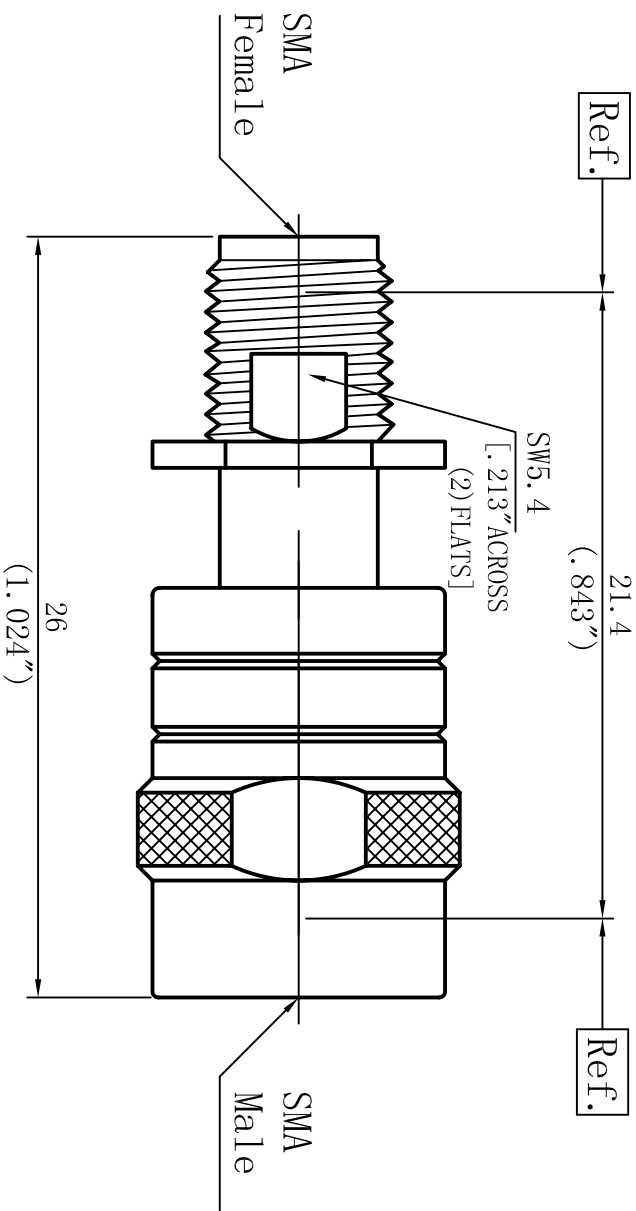

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-27GHz
VSWR: DC-27GHz..... 1.25:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN: Hongtong Fang
CHECKED: Haijin Zhang
APPR. Gang Cao

UNLESS OTHERWISE SPECIFIED:
1. HATCH, ALL DIMENSIONS, AND ALL CORNERS, SHARP EDGES, 0.45 R MAX.
2. DIMENSIONS ON CROWN CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ON CROWN CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: 10

DESCRIPTION	DATE	APPR.
LTR		

TITLE	DWG NO.
SMA Adapter	K555510S01
OUTLINE DRAWING	SIZE: A4-h SCALE: 4:1 REV. V2.0 SHEET 1/1