


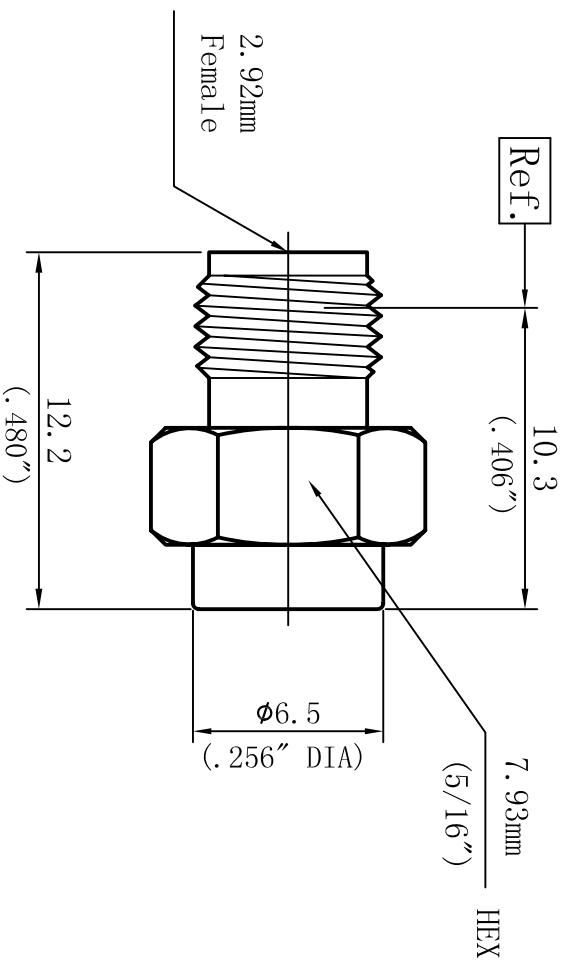

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz.... 1.20:1 (Max)
Power Handling: 0.5W

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALIVMTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALIVM TECHNOLOGY.



UNIT
mm

DRAWN Shaoqing Du
CHECKED Haimin Zhang
APPR. Gang Cao

1. EXAMINE ALL DIMENSIONS SPECIFIED.
2. EXAMINE ALL DIMENSIONS SPECIFIED.
3. EXAMINE ALL DIMENSIONS SPECIFIED.
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED.

LTR DESCRIPTION

DATE

APPR.

SIZE A4-h

SCALE: 4:1

REV.

V2.0

SHEET 1/1

T360P0Z01
OUTLINE DRAWING

2.92mm Load