

A

A

B


B

C

C

D

D

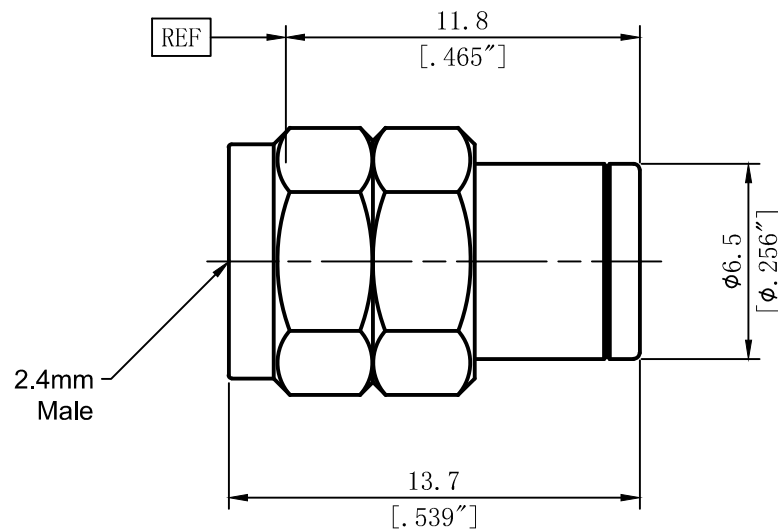

### Performance Features:

Nominal Impedance:50Ω  
Frequency Range:DC-50GHz  
VSWR:1.35:1(Max)  
Power Handling:1W

### Materials/Finishes:


Housing:Stainless Steel,Passivated  
Center Contact:Beryllium Copper,Gold Plated  
Insulators:PEI



4th Floor, West Unit,  
Incubation Building 1  
Guanghua Lu, Nanjing  
TEL:025-84304950  
FAX:025-84304959  
WWW.ALLWINTeK.COM

PROPRIETARY INFORMATION: THE INFORMATION WITHIN THIS DRAWING IS  
PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR  
WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DIRECTION OF VIEW



UNIT

mm

TITLE

2.4-J Load

DRAWN

Ping Wang

CHECKED

Shaoqin Du

APPR.

Dong Wu

DWG NO.

T371P1Z01H

UNLESS OTHERWISE SPECIFIED:  
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX  
2. LINEARITY TOLERANCES: ±0.2, ANGLE TOLERANCES: ±1°  
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1  
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHES: V

OUTLINE DRAWING

LTR	DESCRIPTION	DATE	APPR.
-----	-------------	------	-------

DO NOT SCALE DRAWING

SIZE A4 a

SCALE 4:1

REV. V2.0

SHEET 1/1

1

2

5

6