


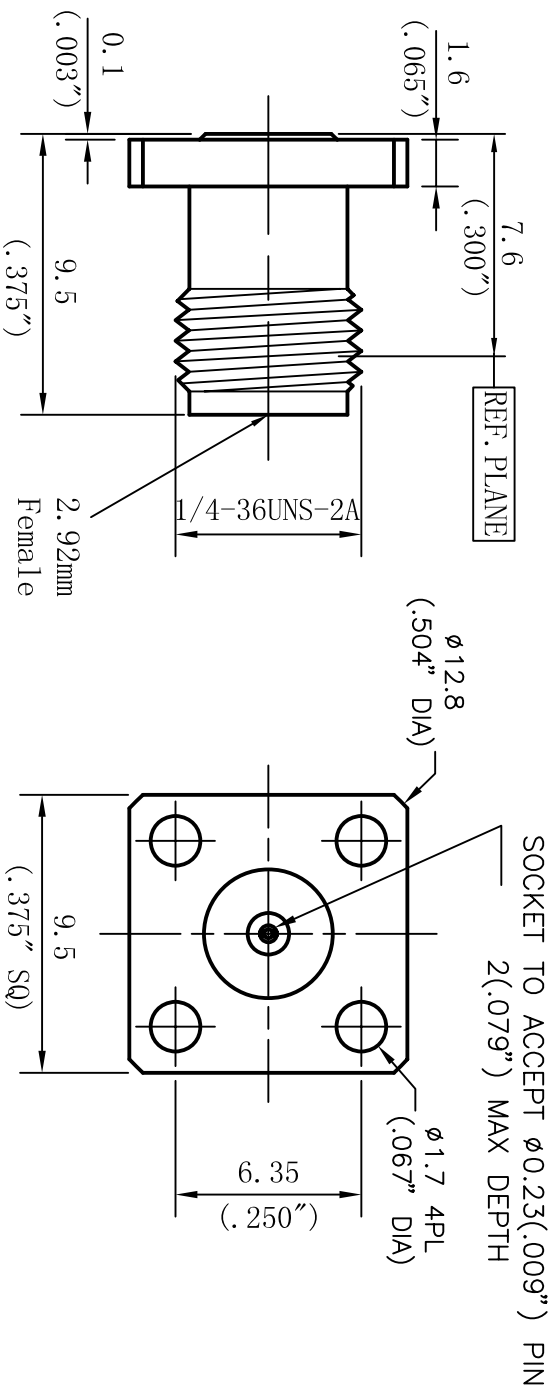

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN: Shaoqing Du
CHECKED: Haijin Zhang
APPR: Gang Cao

UNLESS OTHERWISE SPECIFIED:
1. FINISH: ALL DIMENSIONS, BREAK ALL CORNERS, SHARP EDGES 0.06 R MAX
2. DIMENSIONS ON COORDINATE SYSTEMS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: V

DO NOT SCALE DRAWING

TITLE
2.92mm Connector

DWG NO.
D360S09F02

OUTLINE DRAWING

SIZE: A4-h SCALE: 4:1 REV. V2.0 SHEET 1/1