
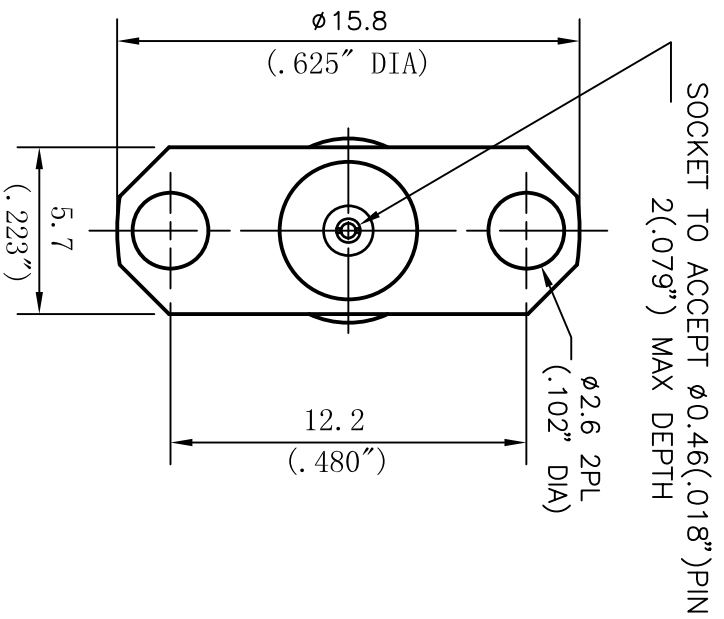


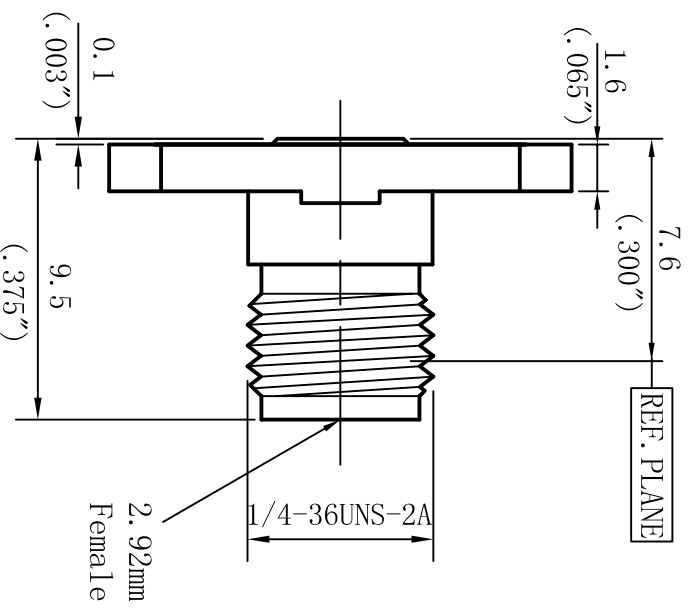

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Ln, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALIVINTECH.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALIVIN TECHNOLOGY.



UNIT
mm

TITLE
2.92mm Connector

DRAWN Xin Gong
CHECKED Huijin Zhang
APPR. Gang Cao

DWG NO.
D360S18F04

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL DIMENSIONS, BREAK ALL CORNERS, SHARP EDGES 0.06 R MAX
2. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED
3. DIMENSIONS ON CORDON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: V

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR.

SIZE A4-h SCALE: 4:1 REV. V2.0 SHEET 1/1