
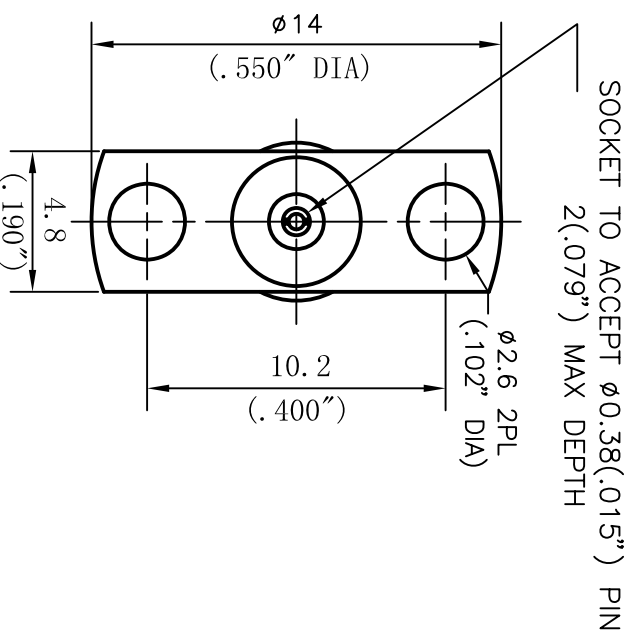


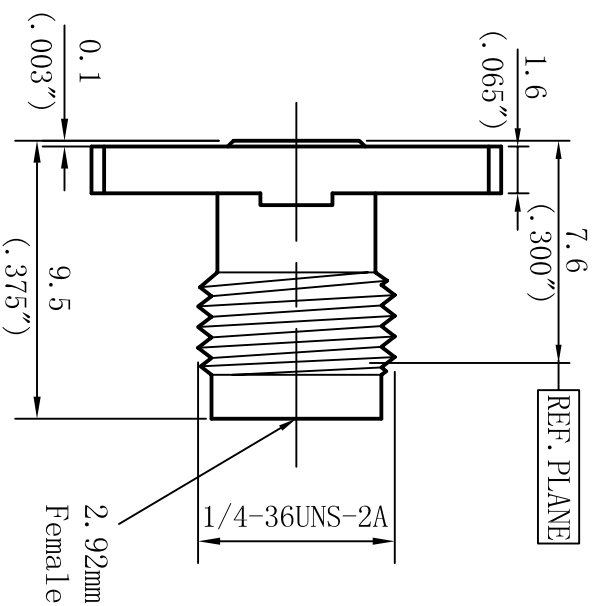

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Ln, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALVINTECH.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIN TECHNOLOGY.



UNIT
mm

DRAWN Shaoqing Du
CHECKED Haimin Zhang
APPR. Gang Cao

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BORES, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. DIMENSIONS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: Ra 0.1

DO NOT SCALE DRAWING

TITLE
2.92mm Connector
DWG NO.
D360S15F05

OUTLINE DRAWING

SIZE A4-h SCALE:4:1 REV. V2.0 SHEET1/1