
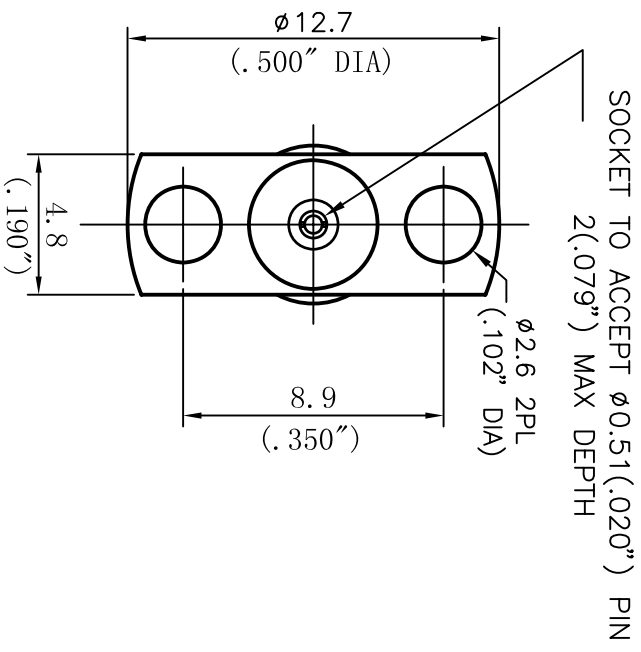


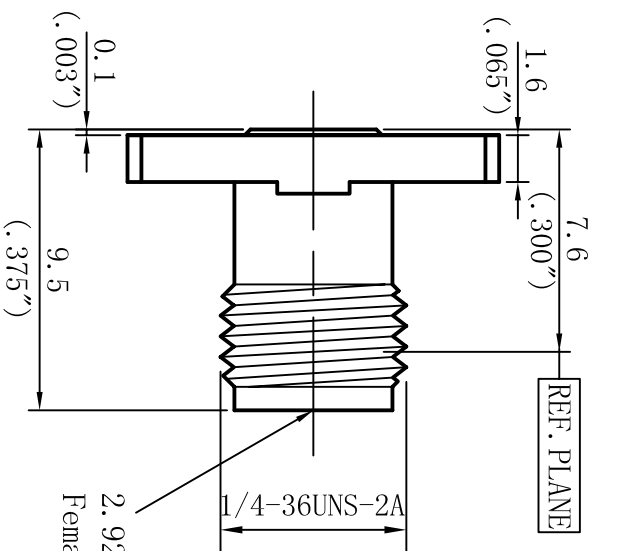

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI

4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALIVINTECH.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALIVIN TECHNOLOGY.

DIRECTION OF VIEW

UNIT
mm

TITLE
2.92mm Connector

DRAWN	Shaoqing Du
CHECKED	Haijin Zhang
APPR.	Gang Cao

DWG NO.
D360S20F06

LTR	DESCRIPTION	DATE	APPR.

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL DIMENSIONS, BREAK ALL CORNERS, SHARP EDGES 0.06 R MAX
2. DIMENSIONS ON DIMENSION LINES ARE TO CENTER UNLESS OTHERWISE SPECIFIED
3. DIMENSIONS ON CORDON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SERVICE FINISHED ✓

DO NOT SCALE DRAWING

SIZE A4-h SCALE:4:1 REV. V2.0 SHEET1/1

OUTLINE DRAWING