


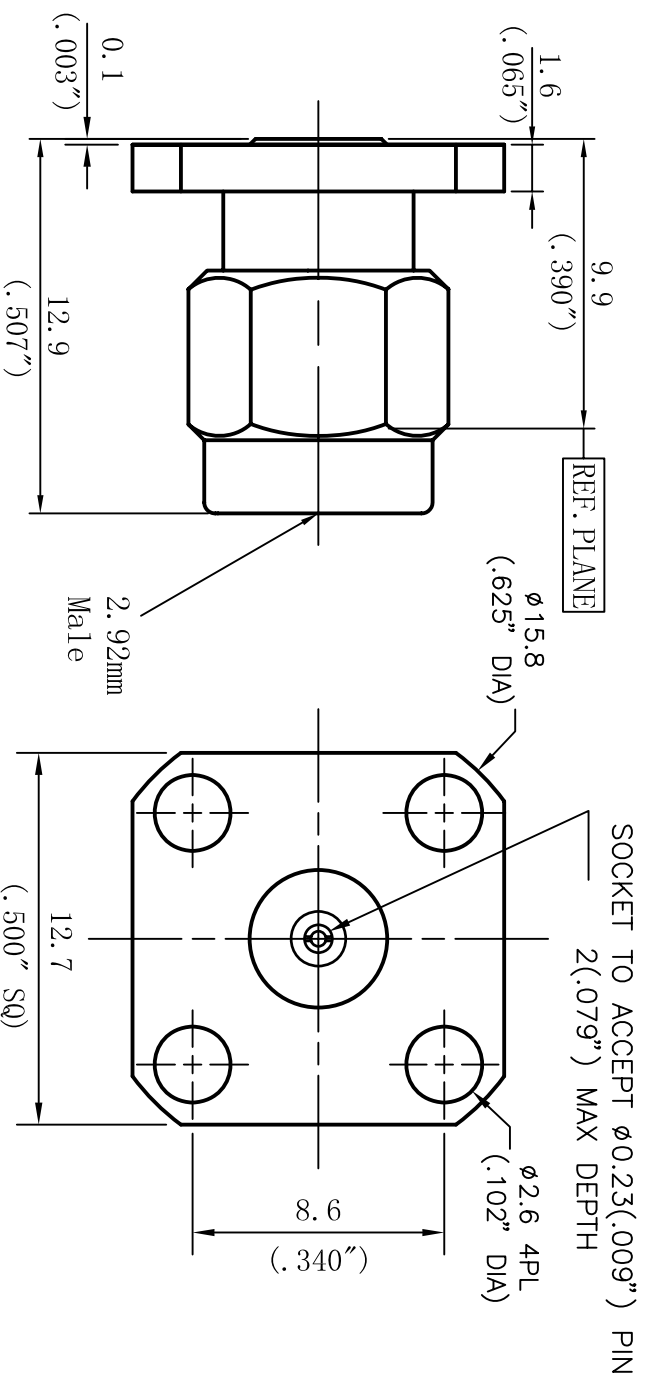

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

TITLE
2.92mm Connector

DRAWN Shaoqing Du
CHECKED Haimin Zhang
APPR. Gang Cao

DWG NO.
D361S09F01

LTR DESCRIPTION DATE APPR.

UNLESS OTHERWISE SPECIFIED:
1. FILLING ALL DIMENSIONS, BREAK ALL CORNERS, SHARP EDGES 0.06 R MAX
2. DIMENSIONS ON DIMENSION LINES TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ON CORNER CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

DO NOT SCALE DRAWING

SIZE A4-h SCALE: 4:1 REV. V2.0 SHEET 1/1

OUTLINE DRAWING