
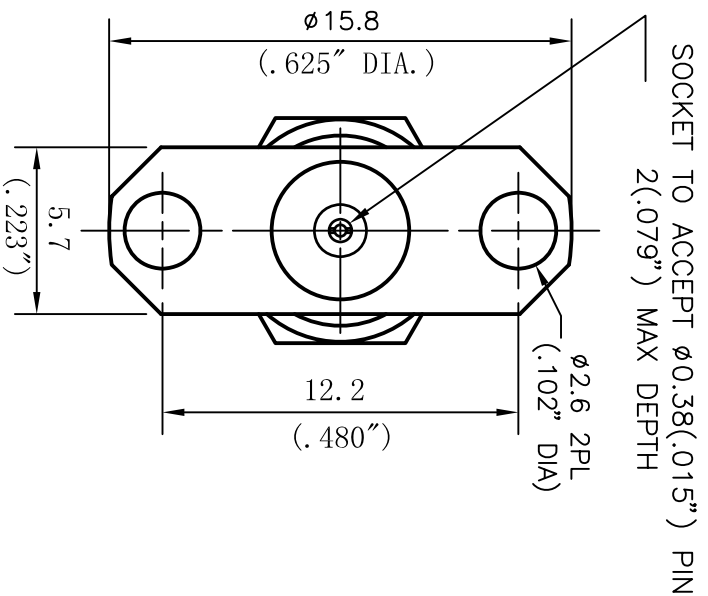


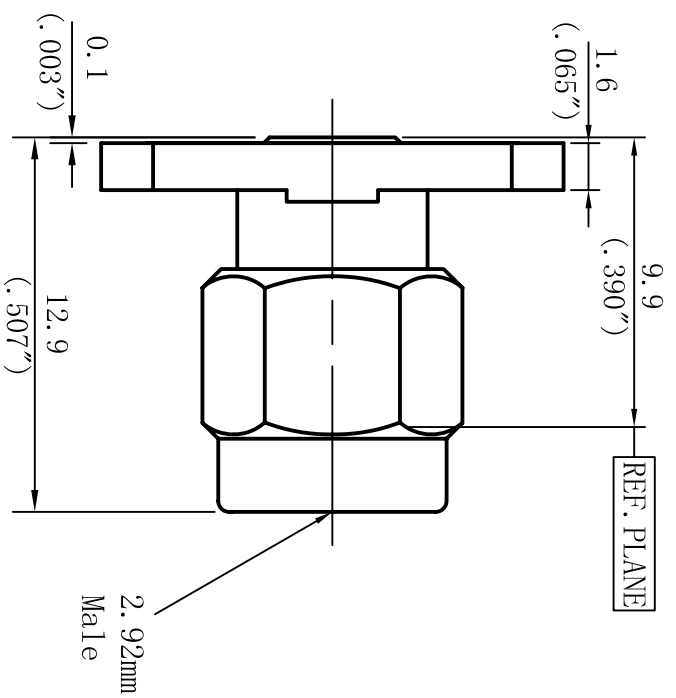

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Ln, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.

DIRECTION OF VIEW	UNIT
	mm
	

DRAWN	Shaoqing Du
CHECKED	Haidin Zhang
APPR.	Gang Cao

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL DIMENSIONS, BREAK ALL CORNERS, SHARP EDGES 0.06 R MAX
2. DIMENSIONS ON COORDINATE SYSTEMS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: Ra 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISH: Ra 0.1

DO NOT SCALE DRAWING

TITLE	DWG. NO.
2.92mm Connector	D361S15F04

OUTLINE DRAWING

SIZE	A4-h	SCALE	4:1	REV.	V2.0	SHEET	1/1
------	------	-------	-----	------	------	-------	-----