
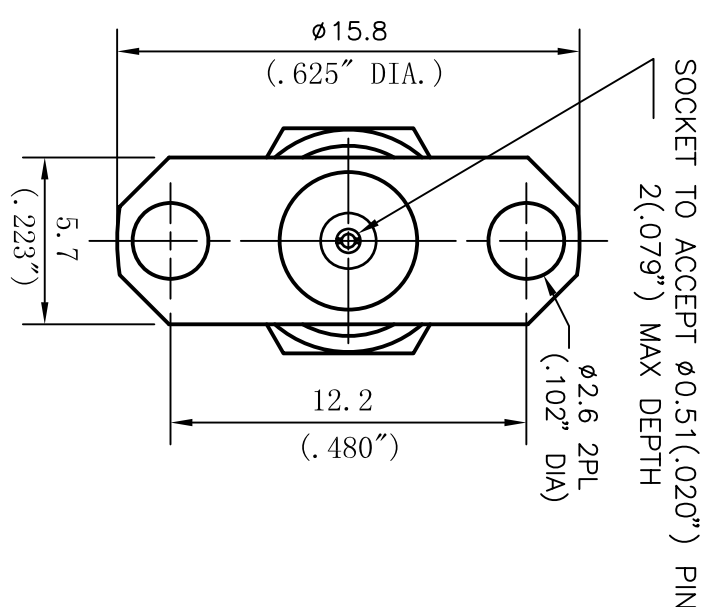


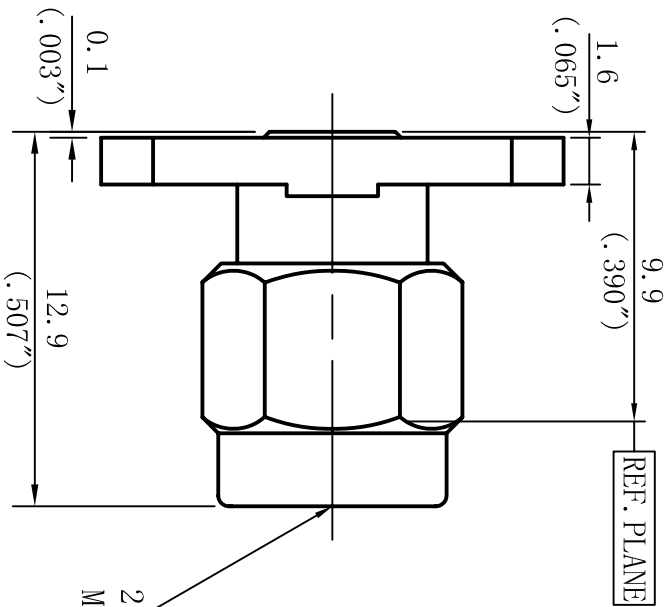

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

TITLE
2.92mm Connector

DRAWN: Shaoqing Du
CHECKED: Haijin Zhang
APPR: Gang Cao

DWG NO.
D361S20F04

LTR	DESCRIPTION	DATE	APPR.

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL DIMENSIONS, BREAK ALL CORNERS, SHARP EDGES 0.06 R MAX
2. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED
3. DIMENSIONS ON CORNER CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER MATING, SURFACE FINISHED

DO NOT SCALE DRAWING

OUTLINE DRAWING

1 2

5 6