
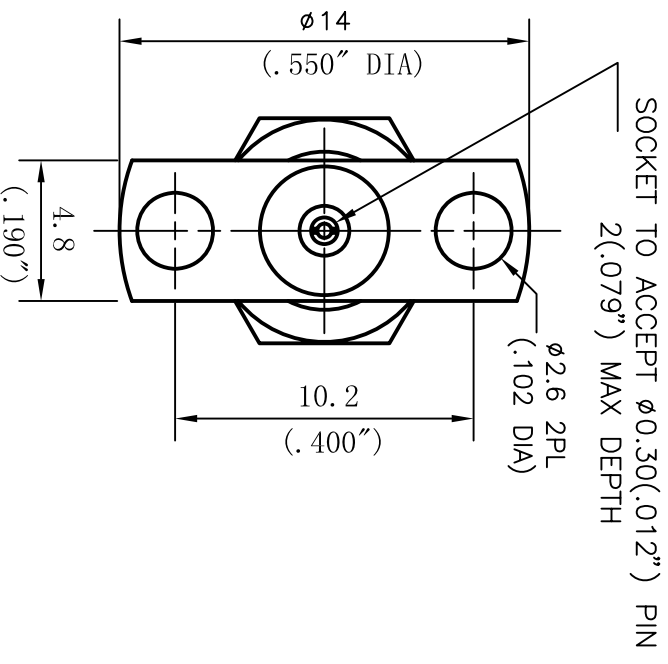


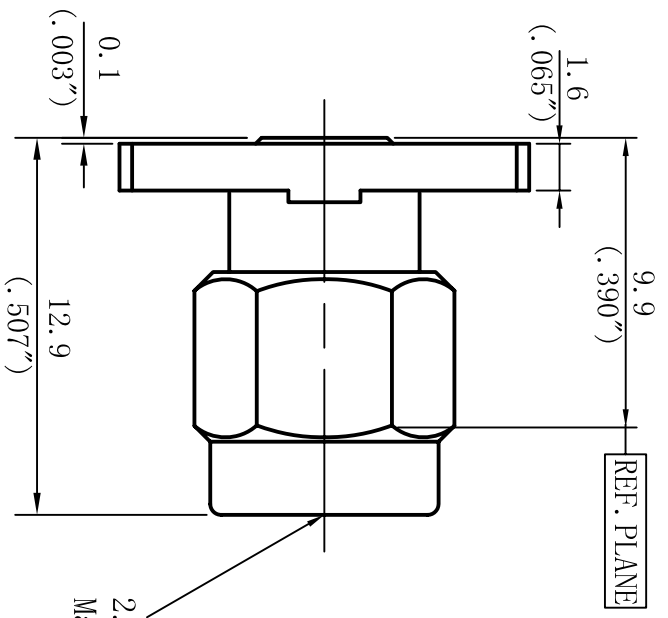

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

TITLE
2.92mm Connector

DRAWN	Shaoqing Du
CHECKED	Haolin Zhang
APPR.	Gang Cao

DWG NO.
D361S12F05

LTR	DESCRIPTION	DATE	APPR.

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURNS, BREAK ALL CORNERS, SHARP EDGES 0.06 R MAX
2. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED
3. DIMENSIONS ON CORDON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

DO NOT SCALE DRAWING

OUTLINE DRAWING