


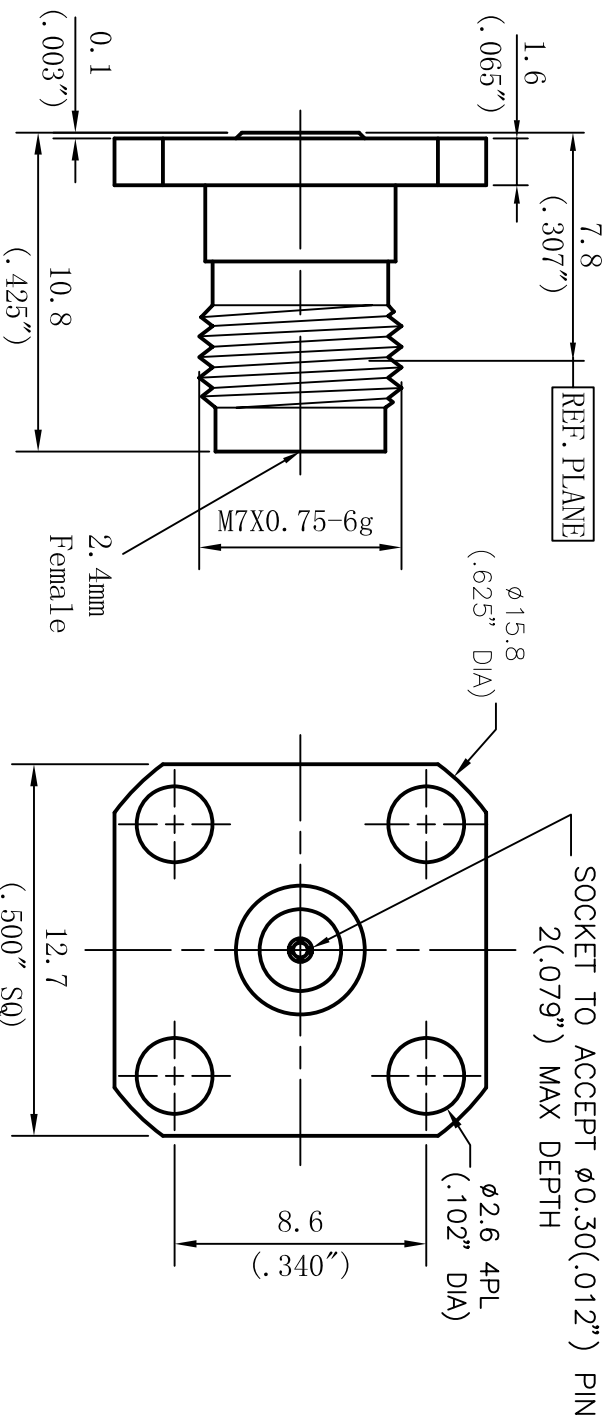

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

TITLE
2.4mm Connector

DWG NO.

D370S12F01

DRAWN
Shaoqing Du

CHECKED
Gang Cao

APPR.
Donald Wu

UNLESS OTHERWISE SPECIFIED:
1. FINISH: ALL DIMENSIONS ARE TO BE CONCENTRIC WITHIN 0.1
2. DIMENSIONS ON CROWN CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ON CROWN CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

DESCRIPTION	DATE	APPR.
LTR		

SIZE	A4-h	SCALE	4:1	REV.	V2.0	SHEET	1/1