


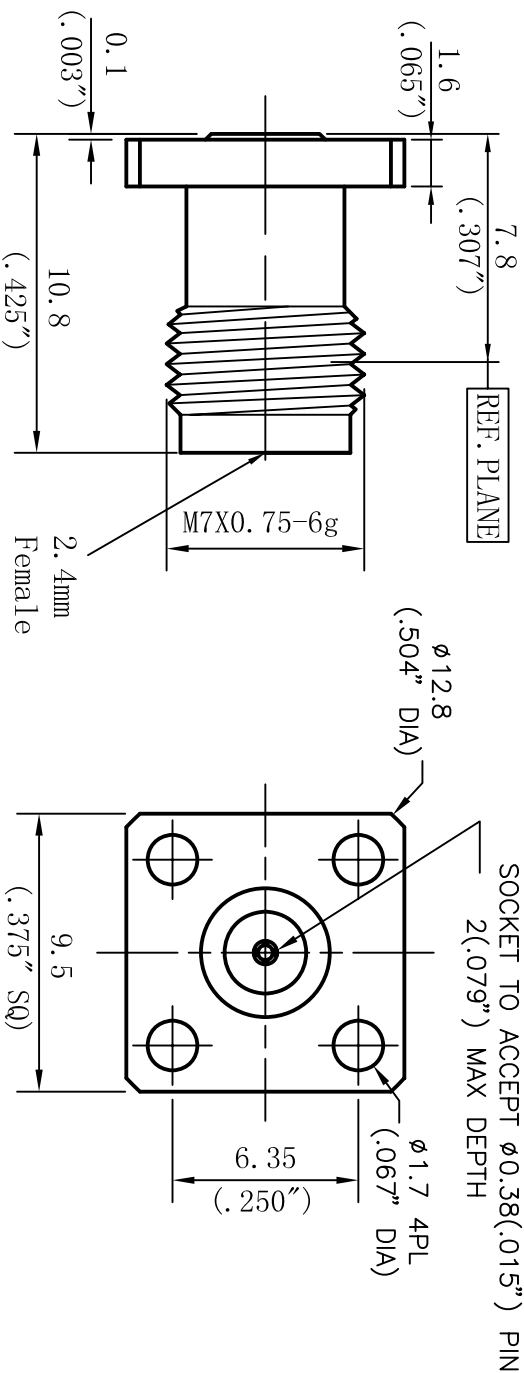

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

TITLE
2.4mm Connector

DRAWN: Shaoqing Du
CHECKED: Haijin Zhang
APPR: Gang Cao

DWG NO.
D370S15F02

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR.

DO NOT SCALE DRAWING

SIZE A4-h

SCALE: 4:1

REV. V2.0

SHEET 1/1