
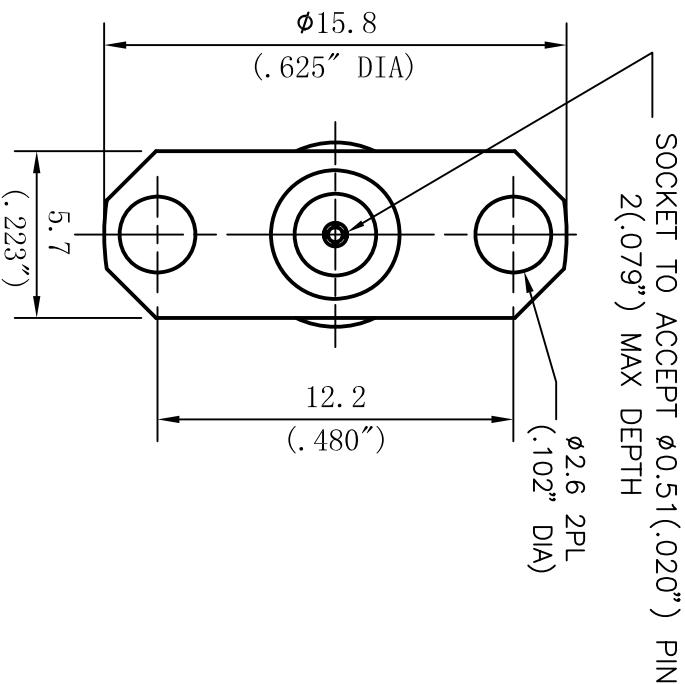


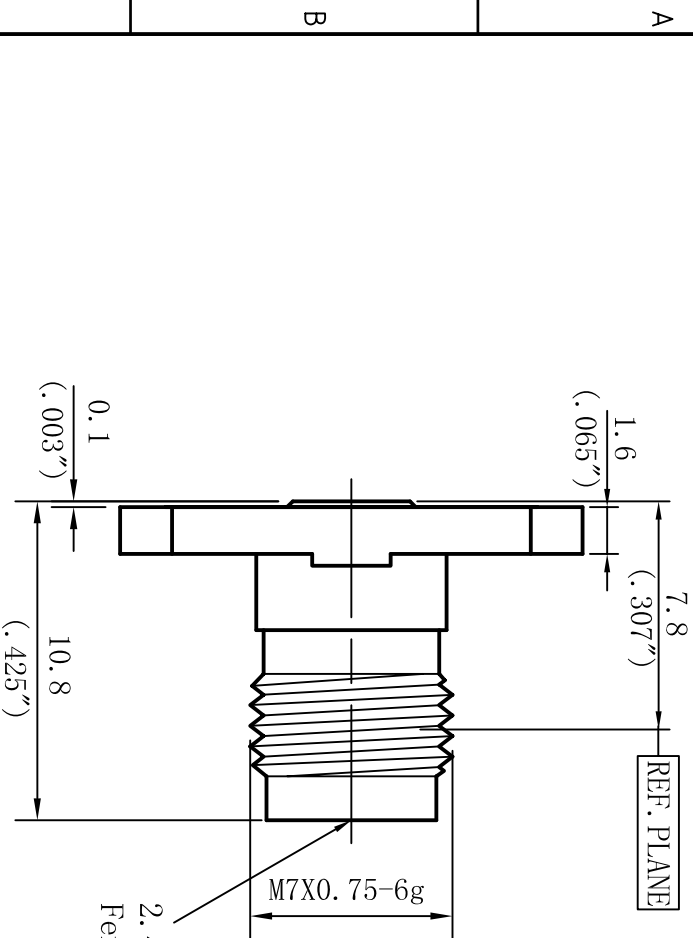

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated Beryllium Copper
Insulators: Gold Plated PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTER.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIM TECHNOLOGY.



DIRECTION OF VIEW

UNIT
mm

DRAWN: Shaoqing Du
CHECKED: Haijin Zhang
APPR.: Gang Cao

DWG NO.

D370S20F04

2.4mm Connector

DESCRIPTION	DATE	APPR.
LTR		

SIZE	A4-h	SCALE	4:1	REV.	V2.0	SHEET	1/1
OUTLINE DRAWING							

1

2

5

6