
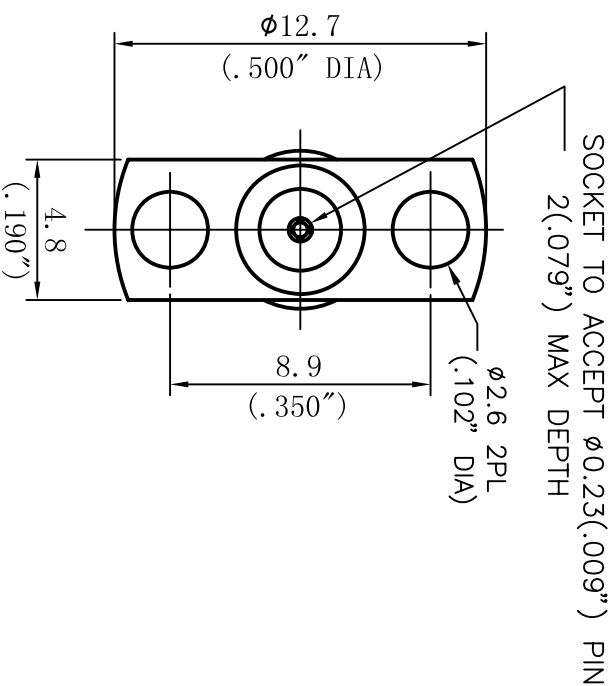


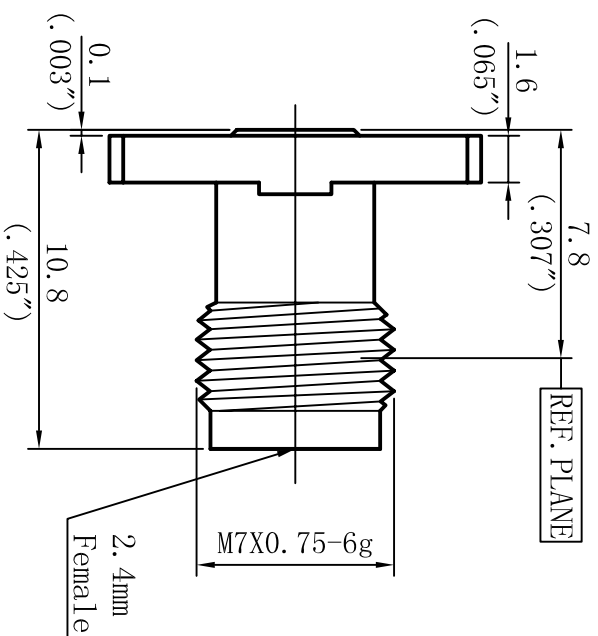

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN: Shaoqing Du
CHECKED: Haijin Zhang
APPR.: Gang Cao

DWG NO.

D370S09F06

2.4mm Connector

OUTLINE DRAWING

LTR

DESCRIPTION

DATE

APPR.

DO NOT SCALE DRAWING

SIZE A4-h

SCALE: 4:1

REV.

V2.0

SHEET 1/1