

A

B

C


D

A


B

C

D

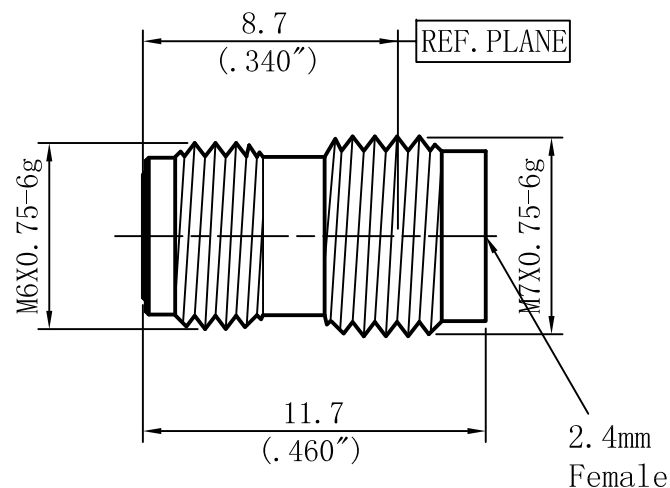

SOCKET TO ACCEPT  $\varnothing 0.23(.009)$  PIN  
2(.079") MAX DEPTH



### Performance Features:

Nominal Impedance:  $50\Omega$   
Frequency Range: DC-50GHz  
VSWR: DC-50GHz.... 1.15:1 (Max)

### Materials/Finishes:

Housing: SU303F  
Polished & Passivated  
Center Contact: Beryllium Copper  
Gold Plated  
Insulators: PEI



4th Floor, West Unit,  
Incubation Building 1  
Guanghua Lu, Nanjing  
TEL: 025-84304950  
FAX: 025-84304959  
WWW.ALLWINTEK.COM

### DIRECTION OF VIEW



### UNIT

mm

### TITLE

2.4mm Connector

PROPRIETARY INFORMATION: THE INFORMATION WHEN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.

DRAWN Shaoqing Du

CHECKED Haimin Zhang

APPR. Gang Cao

UNLESS OTHERWISE SPECIFIED:  
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX  
2. LINEARITY TOLERANCES  $\pm 0.1$ , ANGLE TOLERANCES  $\pm 1^\circ$   
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1  
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED  $\checkmark$

DWG NO.

D370S09Y02

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR.

DO NOT SCALE DRAWING

SIZE A4\_h

SCALE 4: 1

REV. V2.0

SHEET 1/1

1

2

5

6