


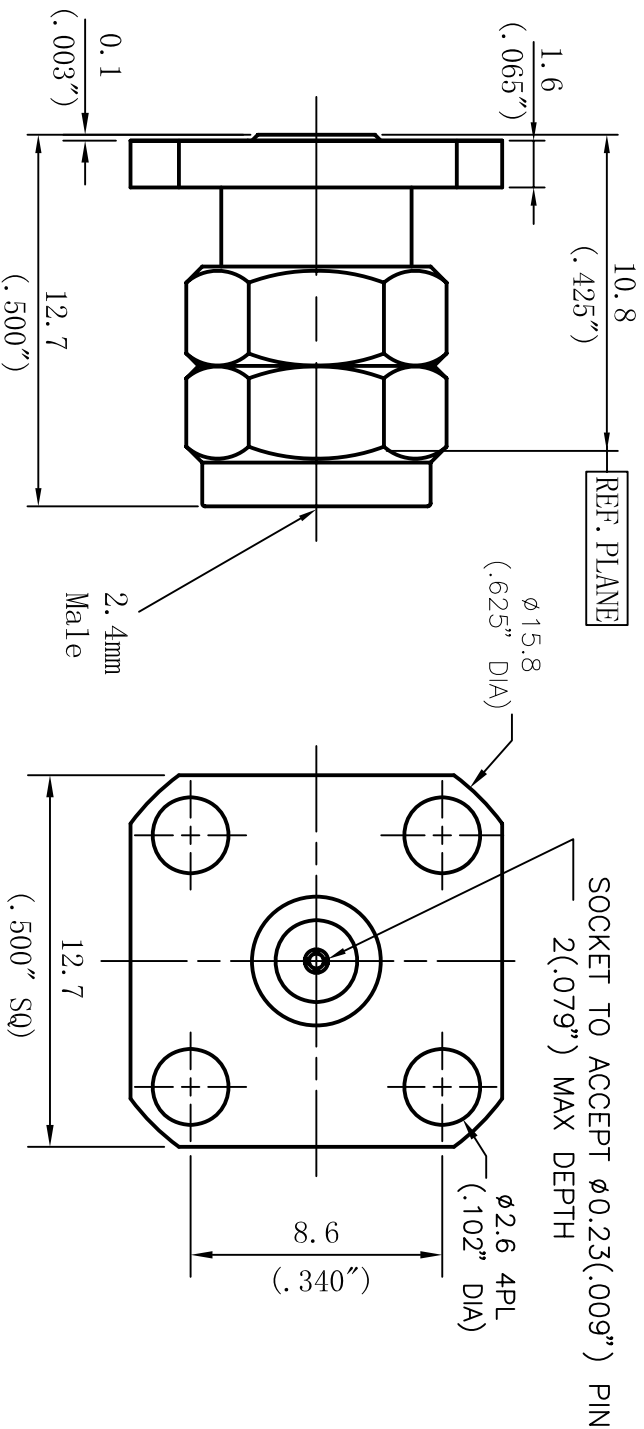

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALIVINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALIVIN TECHNOLOGY.

DIRECTION OF VIEW	UNIT
	mm

DRAWN	Shaoqing Du
CHECKED	Haijin Zhang
APPR.	Gang Cao

TITLE
2.4mm Connector
DWG NO.
D371S09F01

UNLESS OTHERWISE SPECIFIED:

1. FINISH: ALL DIMENSIONS ARE TO BE CONCENTRIC WITHIN 0.1
2. DIMENSIONS ON CROWN CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ON CROWN CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

DESCRIPTION	DATE	APPR.
LTR		

SIZE	SCALE	REV.	SHEET
A4-h	4:1	V2.0	1/1