


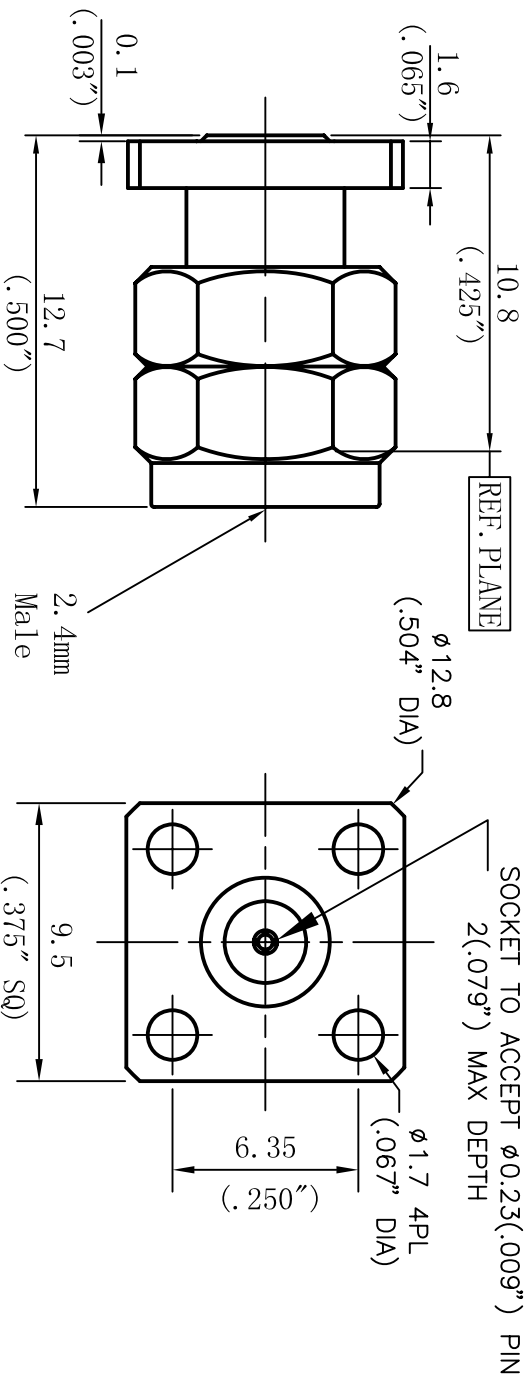

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-50GHz
VSWR: DC-50GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALIVINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALIVIN TECHNOLOGY.



UNIT
mm

TITLE
2.4mm Connector

DRAWN
CHECKED
APPR.

Shaoqing Du
Haimin Zhang
Gang Cao

DWG NO.
D371S09F02

OUTLINE DRAWING

LTR

DESCRIPTION
DATE
APPR.

DO NOT SCALE DRAWING

SIZE A4-h

SCALE: 4:1

REV. V2.0

SHEET 1/1