


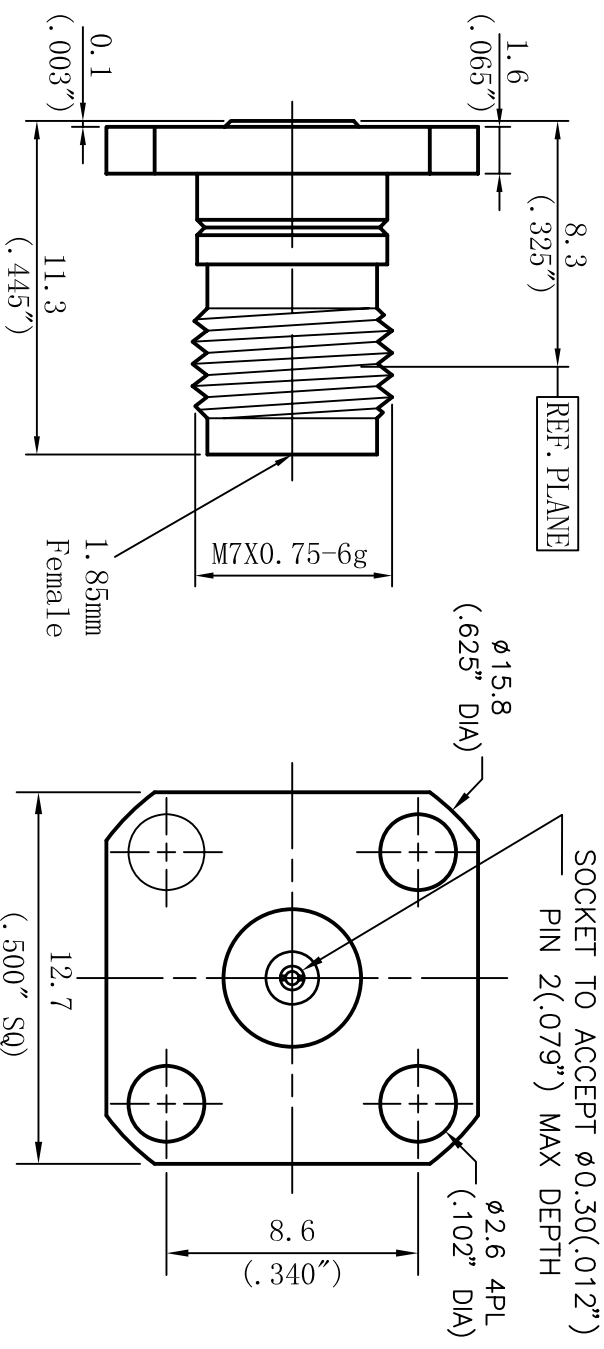

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-65GHz
VSWR: DC-65GHz.... 1.25:1 (Max)


Materials/Finishes:

Housing: SU303F
Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Guanhua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN	Xin Gong
CHECKED	Haijin Zhang
APPR.	Gang Cao

1. REMOVE ALL DIMENSIONS SPECIFIED.
2. REMOVE ALL DIMENSIONS SPECIFIED.
3. DIMENSIONS ON CROWN CEMENTS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

LTR	DESCRIPTION	DATE	APPR.

TITLE
1.85mm Connector
DWG NO.
D380S12F01

OUTLINE DRAWING

SIZE	A4-h	SCALE	4:1	REV.	V2.0	SHEET	1/1
------	------	-------	-----	------	------	-------	-----