


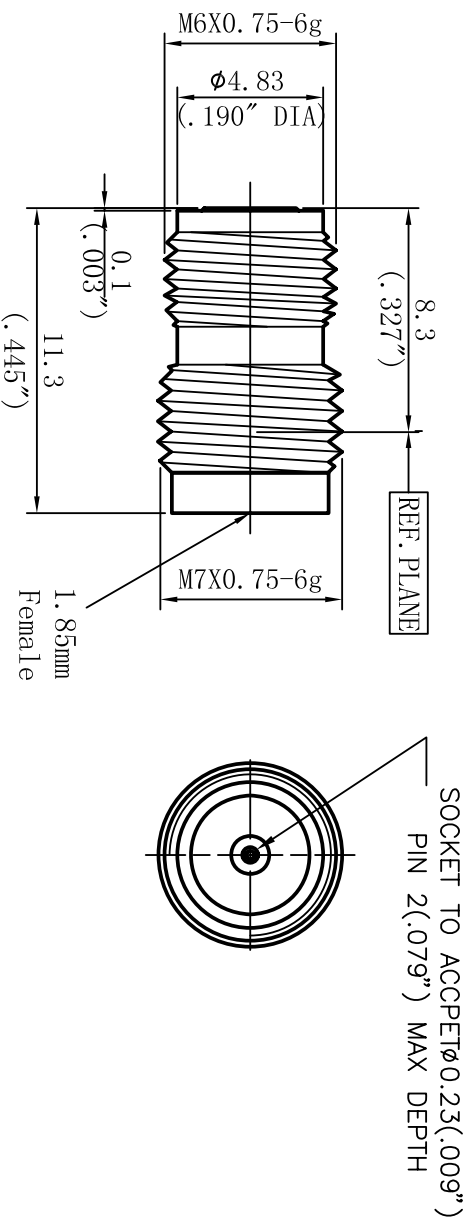

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-65GHz
VSWR: DC-65GHz..... 1.25:1 (Max)

Materials/Finishes:

Housing: SU303F
Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Innovation Building 1
Guanghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALVINTEK.COM

PROPRIETARY INFORMATION: THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIN TECHNOLOGY.



DIRECTION OF VIEW

UNIT
mm

TITLE
1.85mm Connector

DWG NO.

D380S09Y02

DRAWN
Shaoqing Du

CHECKED
Haimin Zhang

APPR.
Gang Cao

1. DIMENSIONS SHOWN IN PARENTHESES ARE IN INCHES.
2. DIMENSIONS ON CORNER EDGES TO BE CONCENTRIC WITHIN 0.1.
3. ALL DIMENSIONS ARE AFTER PLATING, SOLDER FINISHING.
4. ALL DIMENSIONS ARE AFTER PLATING, SOLDER FINISHING.

DO NOT SCALE DRAWING

OUTLINE DRAWING

SIZE A4-h SCALE: 1 REV. V2.0 SHEET 1/1

LTR DESCRIPTION DATE APPR.

1

2

5

6