
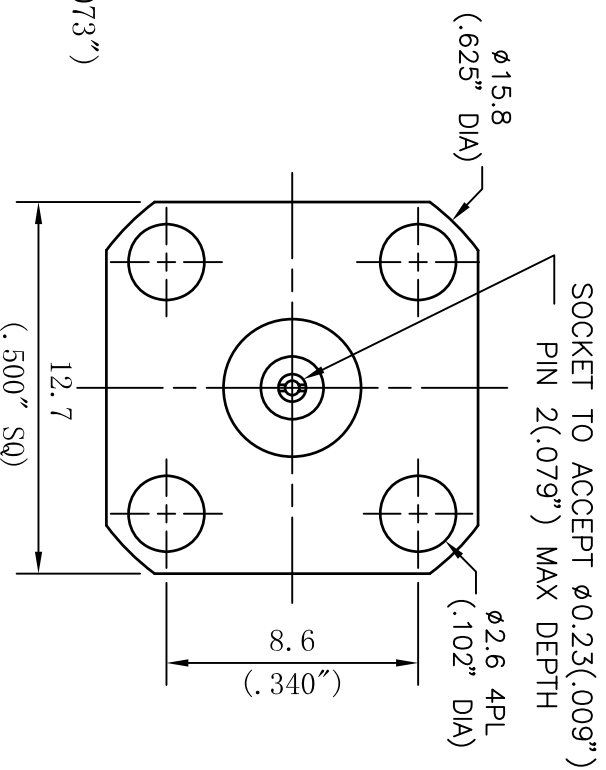


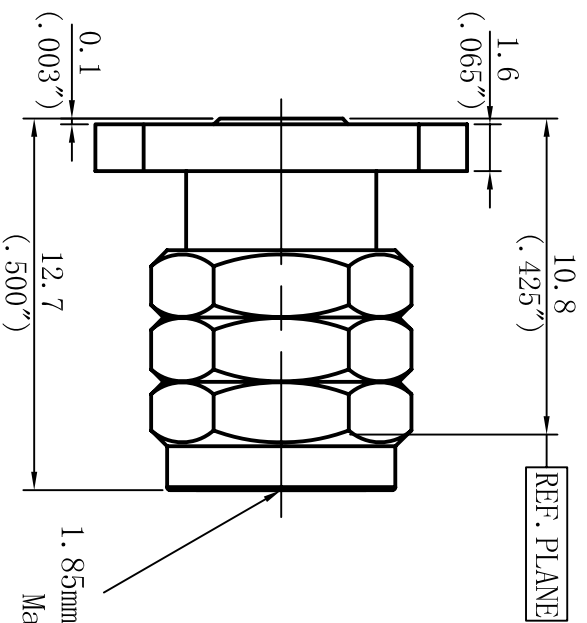

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-65GHz
VSWR: DC-65GHz.... 1.25:1 (Max)

Materials/Finishes:

Housing: SU303F
Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN: Hongtong Fang
CHECKED: Haimin Zhang
APPR: Gang Cao

DWG NO.

D381S09F01

1.85mm Connector

OUTLINE DRAWING

LTR	DESCRIPTION	DATE	APPR.

DO NOT SCALE DRAWING

SIZE A4-h

SCALE: 4:1

REV.

V2.0

SHEET 1/1