


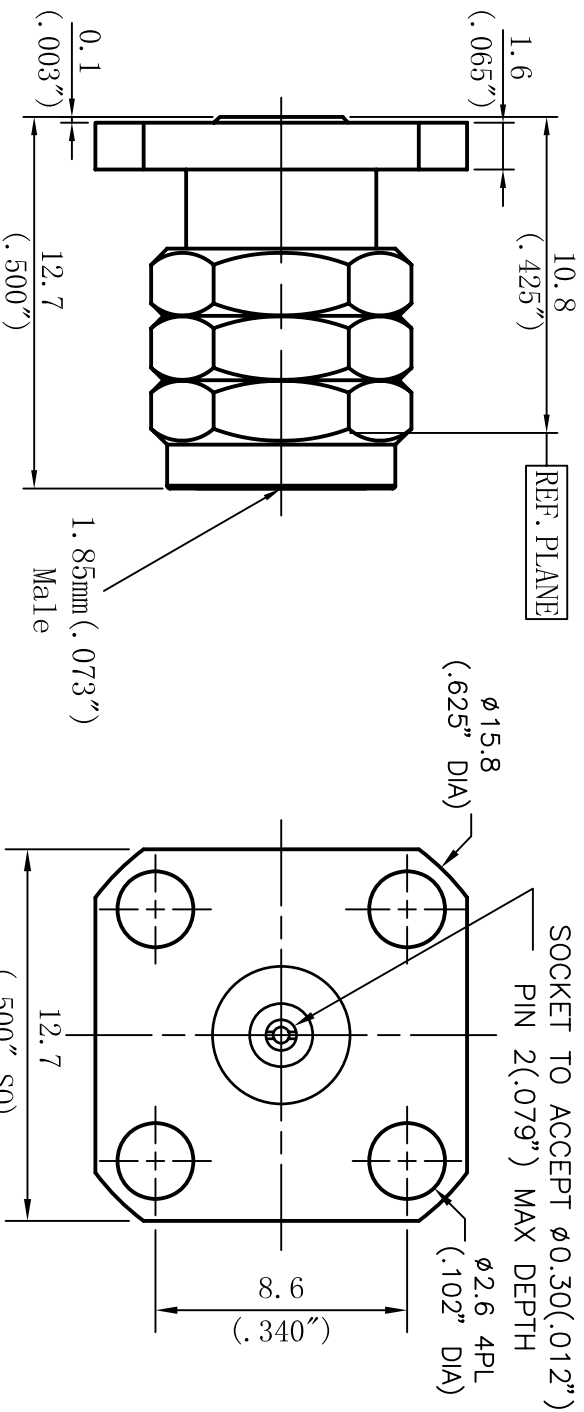

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-65GHz
VSWR: DC-65GHz.... 1.25:1 (Max)

Materials/Finishes:

Housing: SU303F
Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN	Xin Gong
CHECKED	Haijin Zhang
APPR.	Gang Cao

1. REMOVE ALL DIMENSIONS SPECIFIED.
2. REMOVE ALL DIMENSIONS SPECIFIED.
3. DIMENSIONS ON CROWN CASTER TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

LTR	DESCRIPTION	DATE	APPR.

TITLE		DWG NO.
1.85mm Connector		D381S12F01
OUTLINE DRAWING		
SIZE	A4-h	SCALE: 4:1
REV.	V2.0	SHEET 1/1