


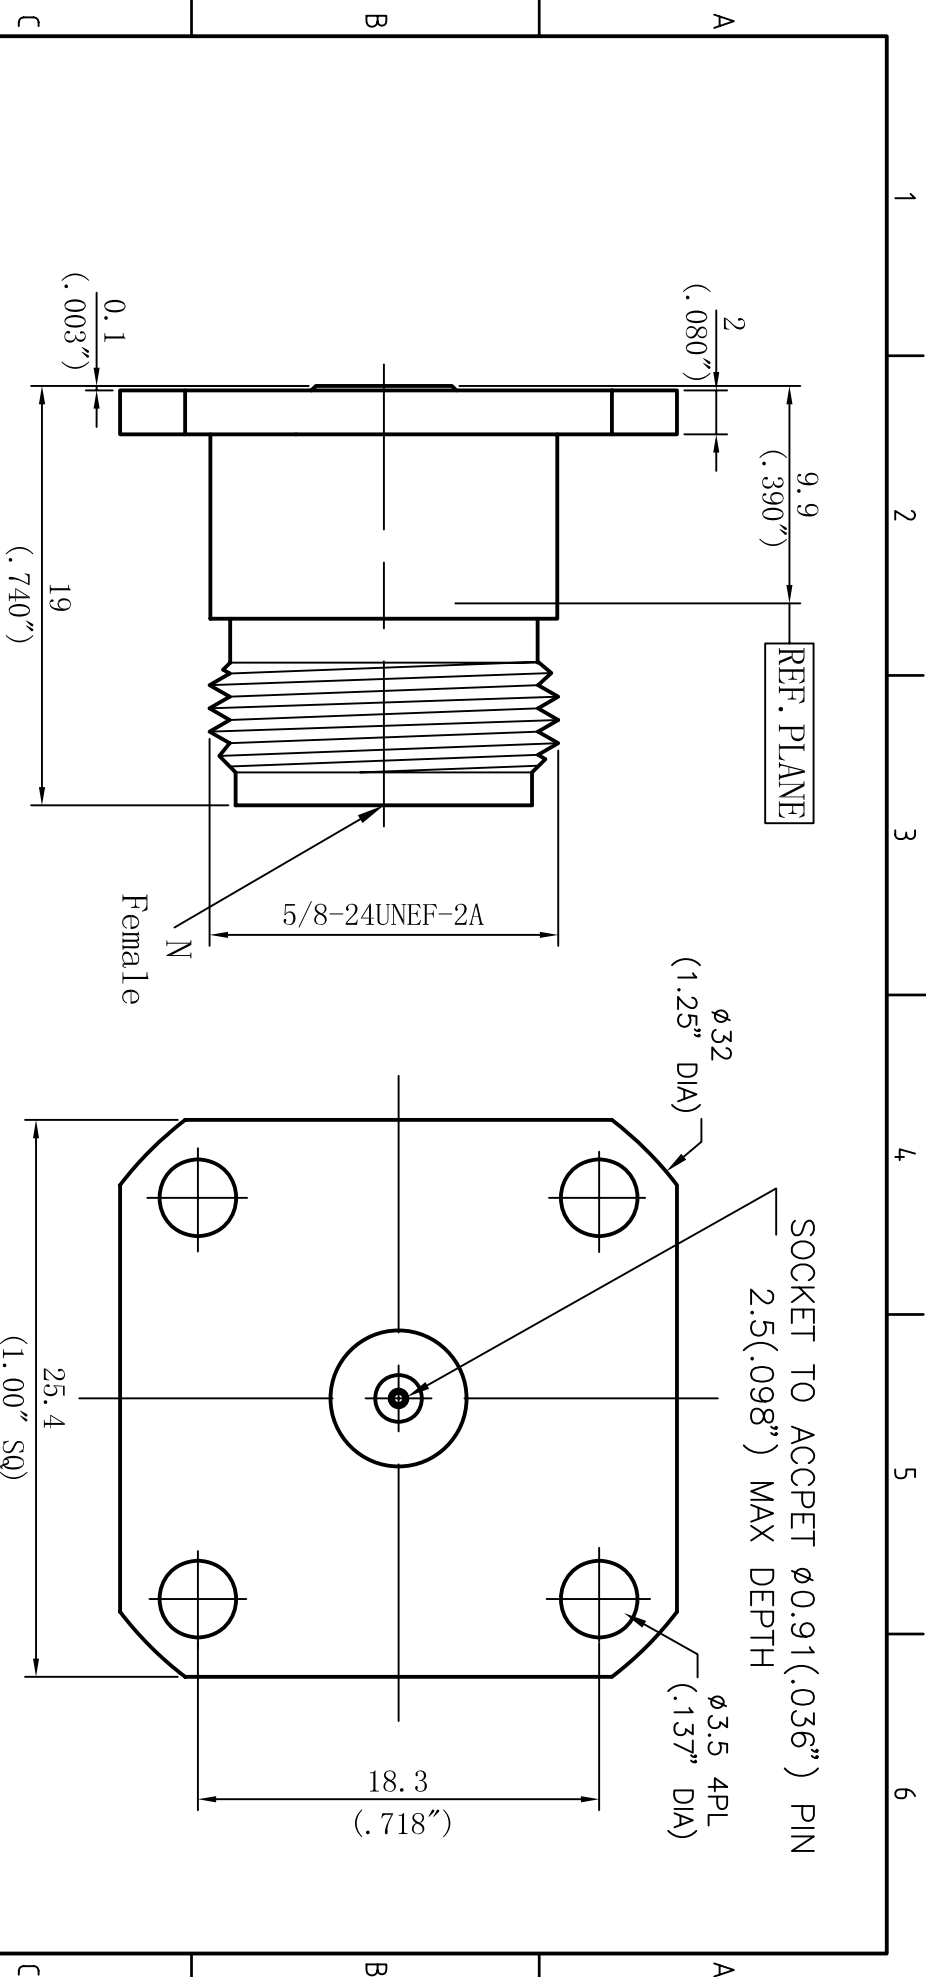

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Gangshu Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTER.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIM TECHNOLOGY.



UNIT
mm

TITLE
N Connector

DWG NO.

D340S36F10

DRAWN
Xiaolu Yu

CHECKED
Shaoging Du

APPR.
Gang Cao

UNLESS OTHERWISE SPECIFIED:
1. HOLE, ALL DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE SPECIFIED.
2. DIMENSIONS ON CROWN CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ARE AFTER PLATING, SURFACE FINISHES
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHES

LTR	DESCRIPTION	DATE	APPR.

SIZE	A4-h	SCALE	4:1	REV.	V2.0	SHEET	1/1