


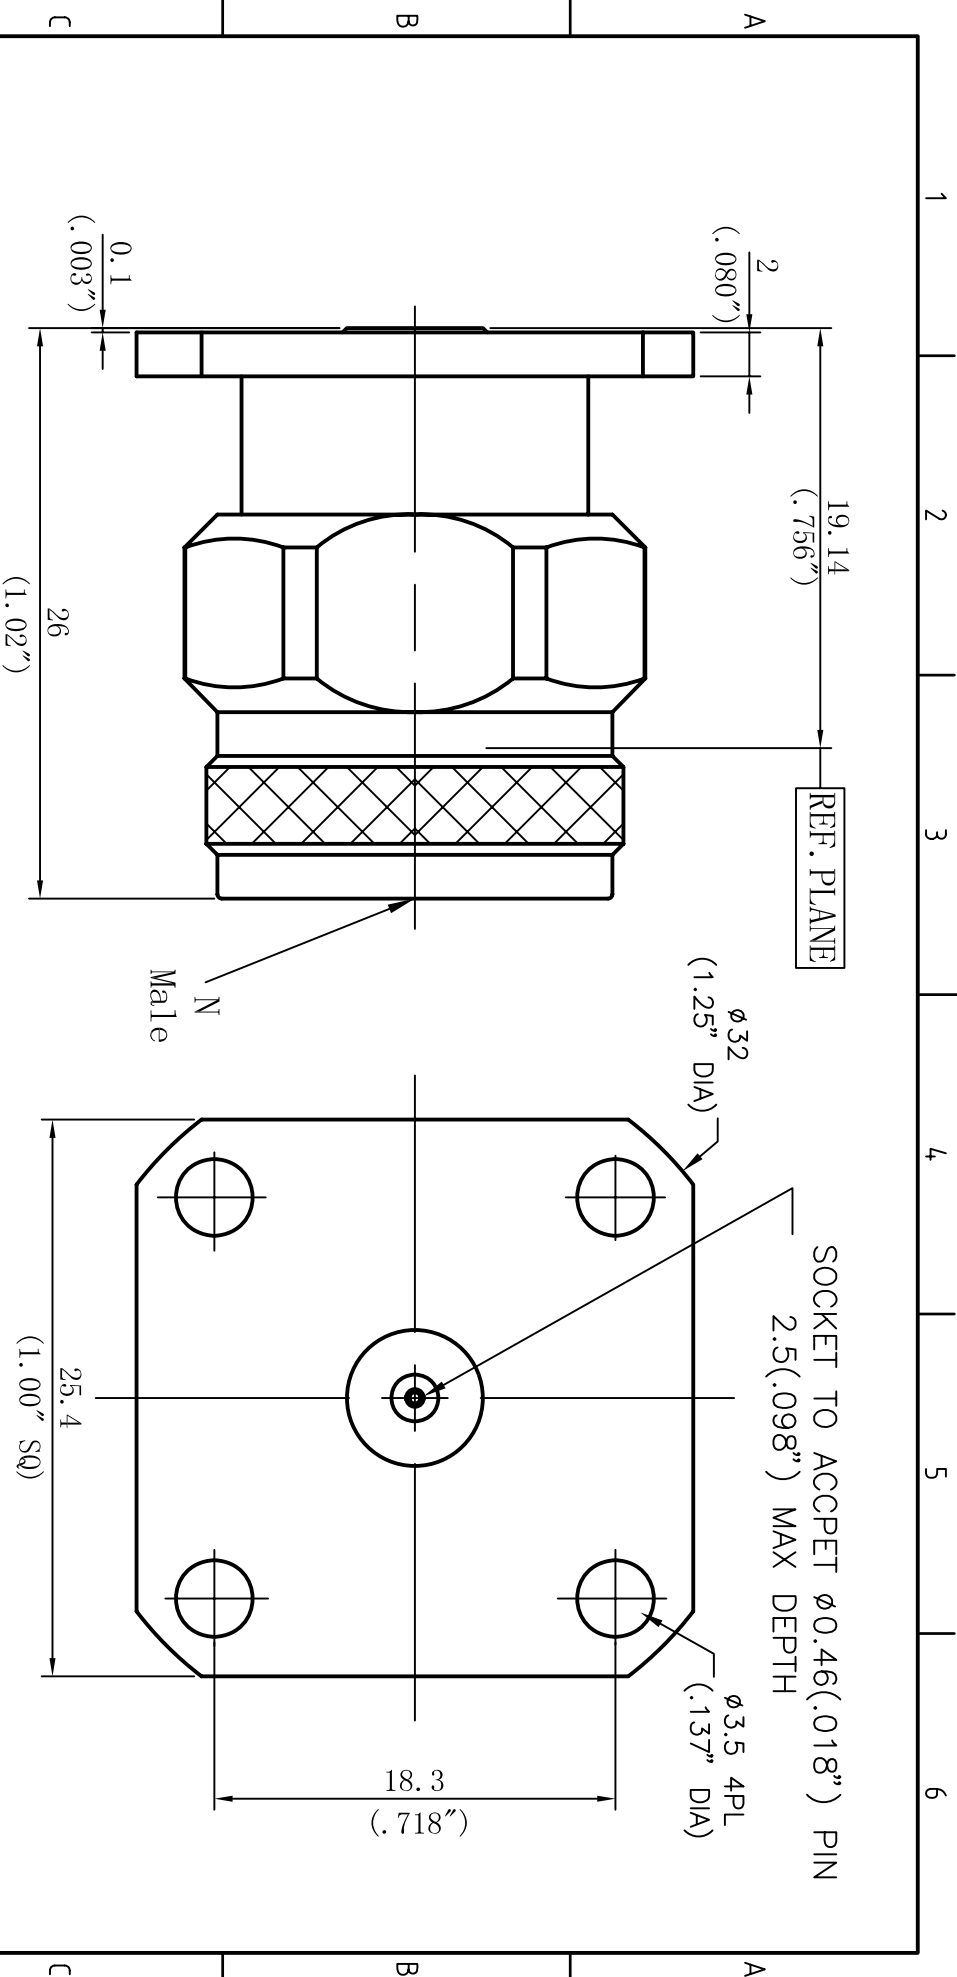

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Gangqun Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTER.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIM TECHNOLOGY.



DIRECTION OF VIEW

UNIT
mm

TITLE
N Connector

DWG NO.

D341S18F10

DRAWN

Shaoqing Du

CHECKED

Hailin Zhang

APPR.

Gang Cao

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL DIMENSIONS, AND ALL CORNERS, SHARP EDGES 0.40 & MAX
2. DIMENSIONS ON COMMON CENTER TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ON COMMON CENTER TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

DO NOT SCALE DRAWING

LTR	DESCRIPTION	DATE	APPR.

OUTLINE DRAWING

SIZE A4-h SCALE 3:1 REV. V2.0 SHEET 1/1