


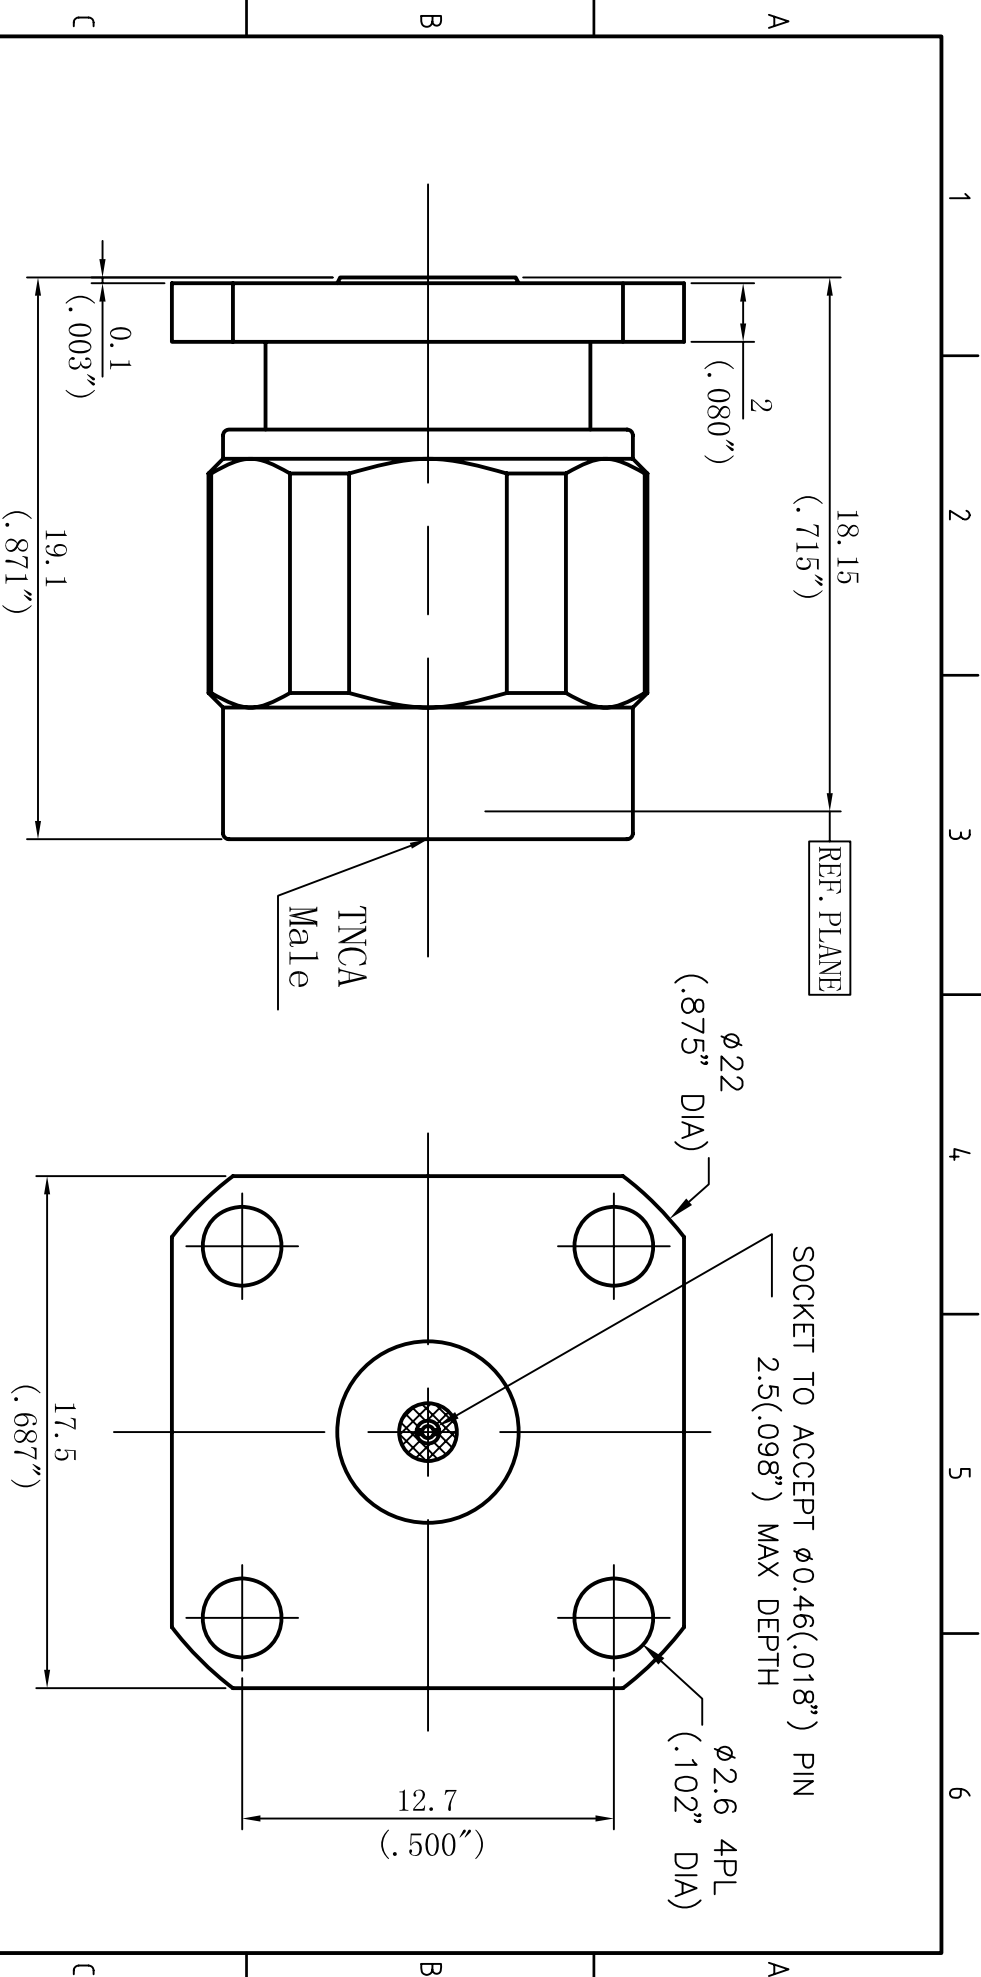

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Guanhua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALVINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIN TECHNOLOGY.



DIRECTION OF VIEW

UNIT
mm

DRAWN
CHECKED
APPR.
Shaoqing Du
Hidain Zhang
Gang Cao

TITLE
TNCA Connector
DWG NO.
D541S18F09

DESCRIPTION	DATE	APPR.
LTR		

SIZE	SCALE	REV.	SHEET
A4_h	1	V2.0	1/1

1

2

5

6