


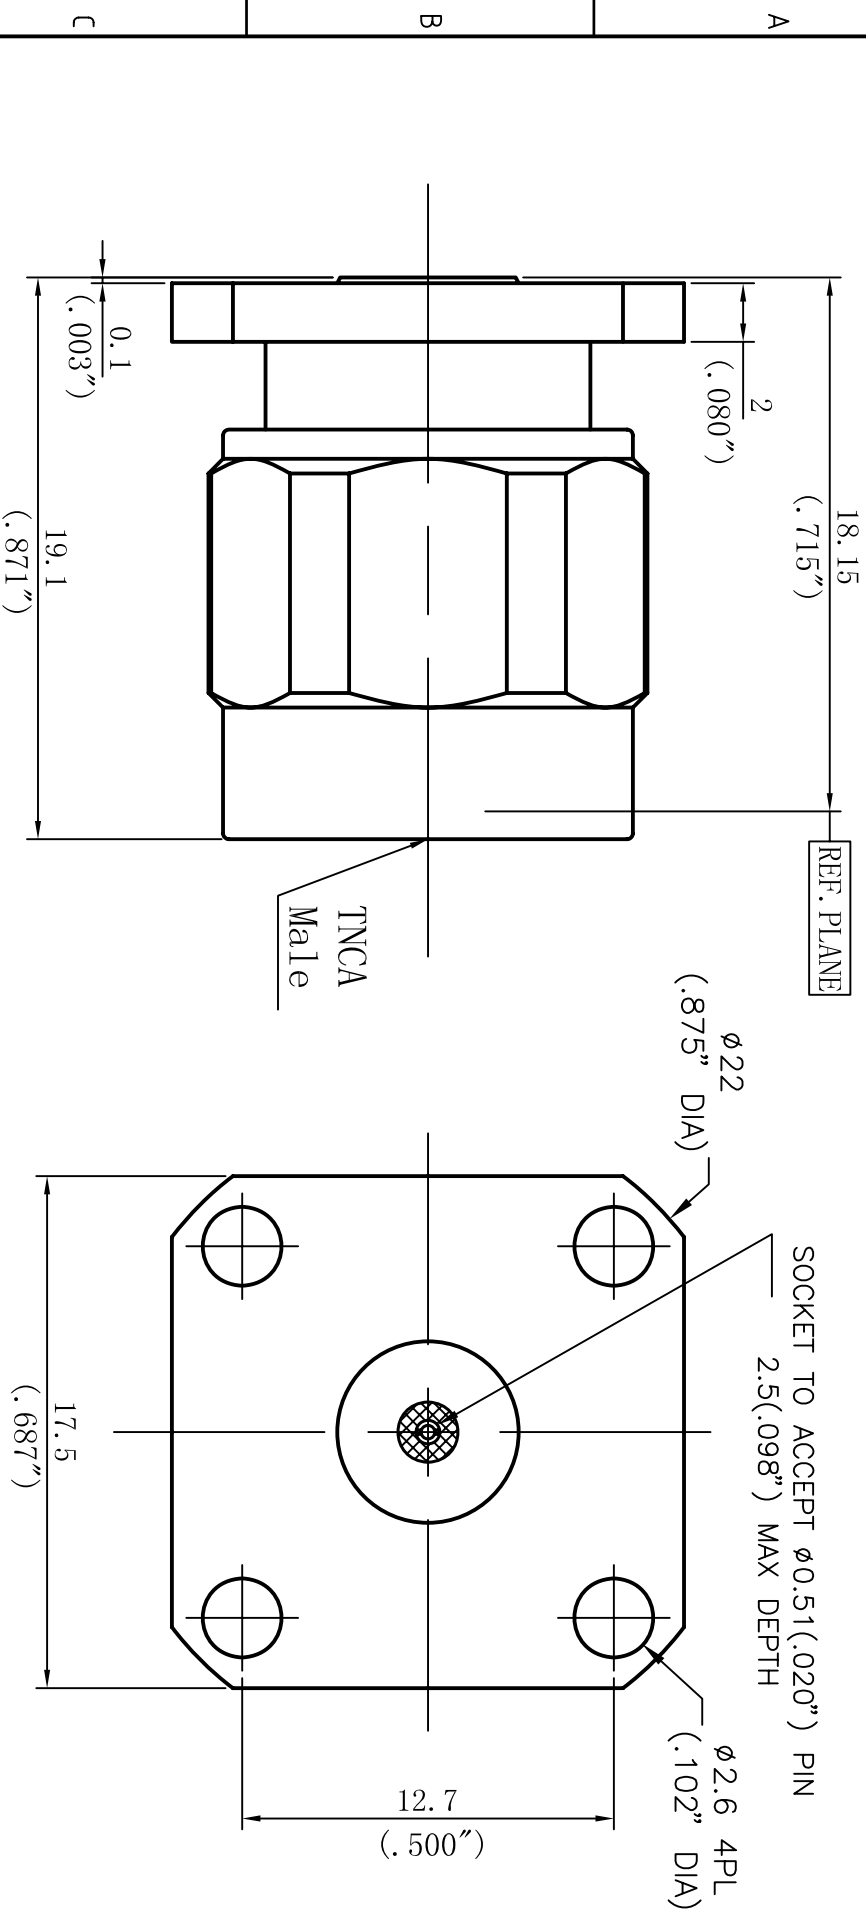

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz..... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Guanhua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALVINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIN TECHNOLOGY.



UNIT
mm

DRAWN
CHECKED
APPR.

Shaoqing Du
Hidain Zhang
Gang Cao

TITLE
TNCA Connector

DWG NO.
D541S20F09

LTR	DESCRIPTION	DATE	APPR.

1. DRAWING ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED.
2. DIMENSIONS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
3. DIMENSIONS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

DO NOT SCALE DRAWING