


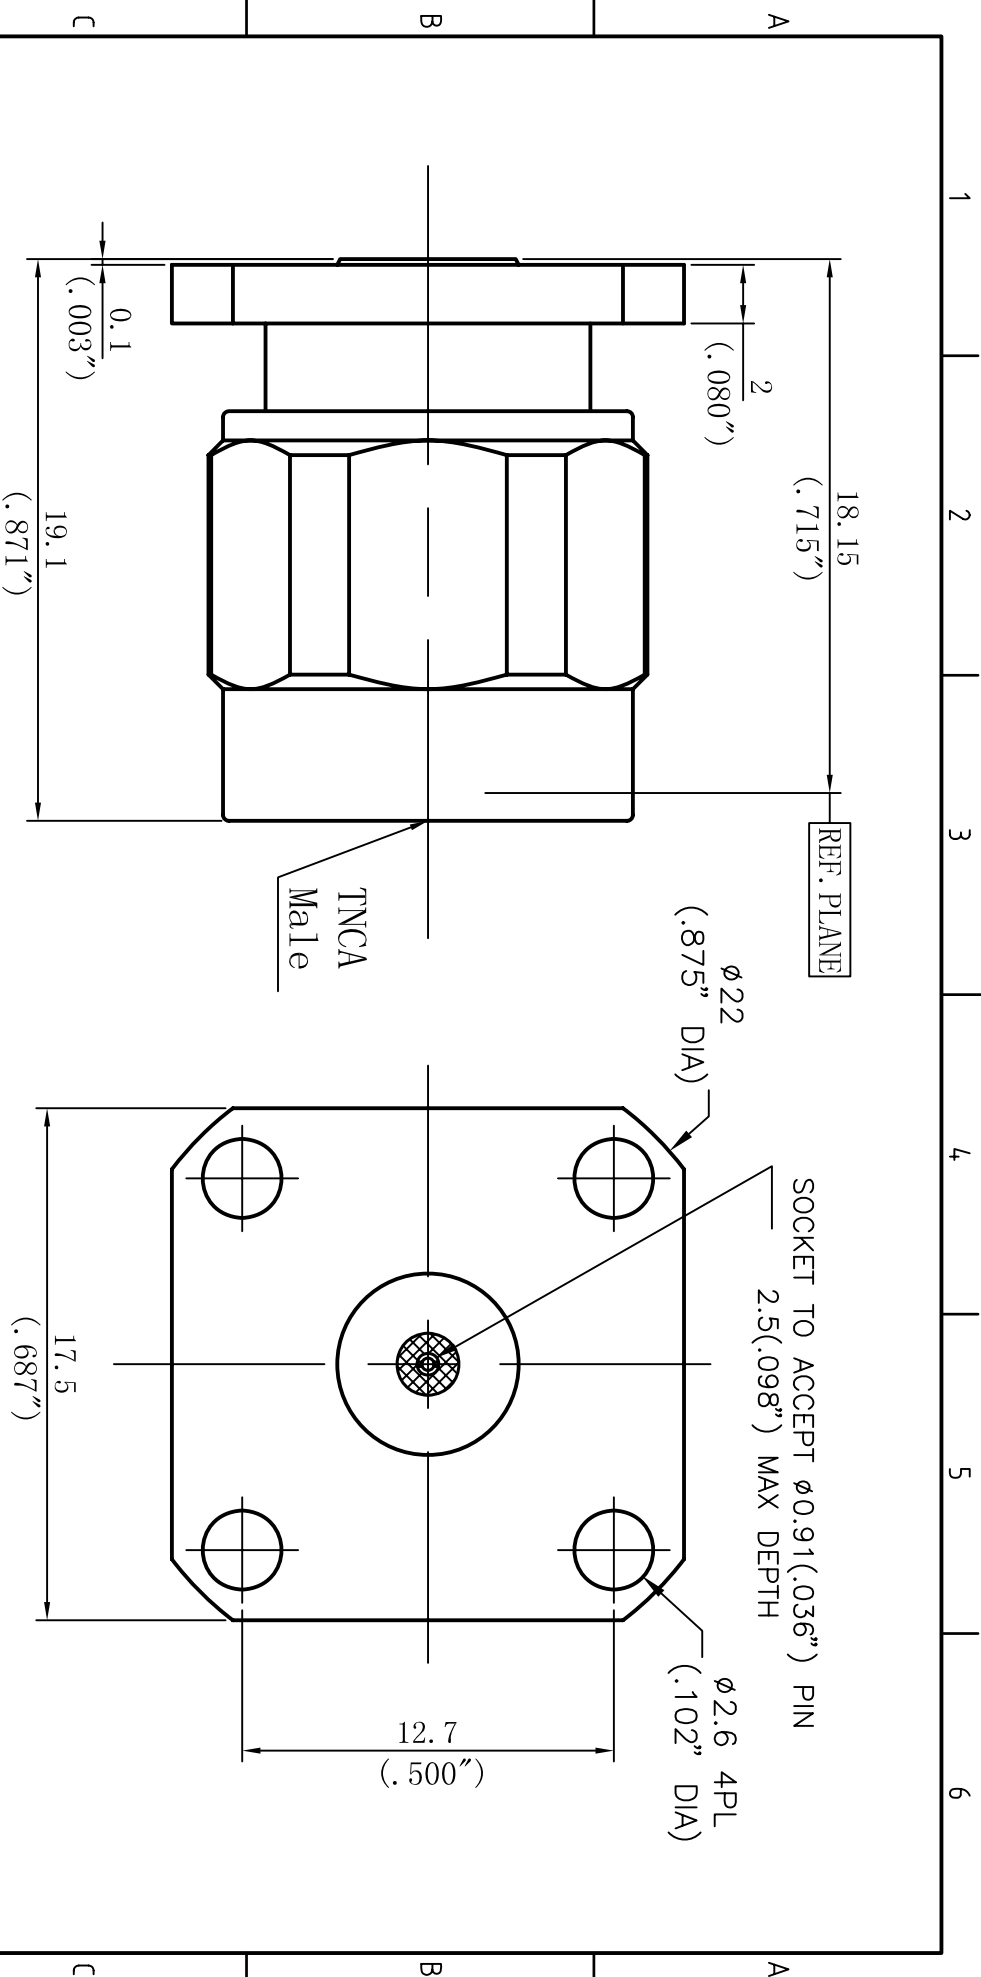

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-18GHz
VSWR: DC-18GHz.... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTER.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALVIM TECHNOLOGY.



UNIT
mm

DRAWN
CHECKED
APPR.
Shaoqing Du
Hidain Zhang
Gang Cao

TITLE
TNCA Connector
DWG NO.
D541S36F09

DESCRIPTION	DATE	APPR.
LTR		

DO NOT SCALE DRAWING

SIZE A4-h
SCALE: 4:1
REV. V2.0
SHEET 1/1