


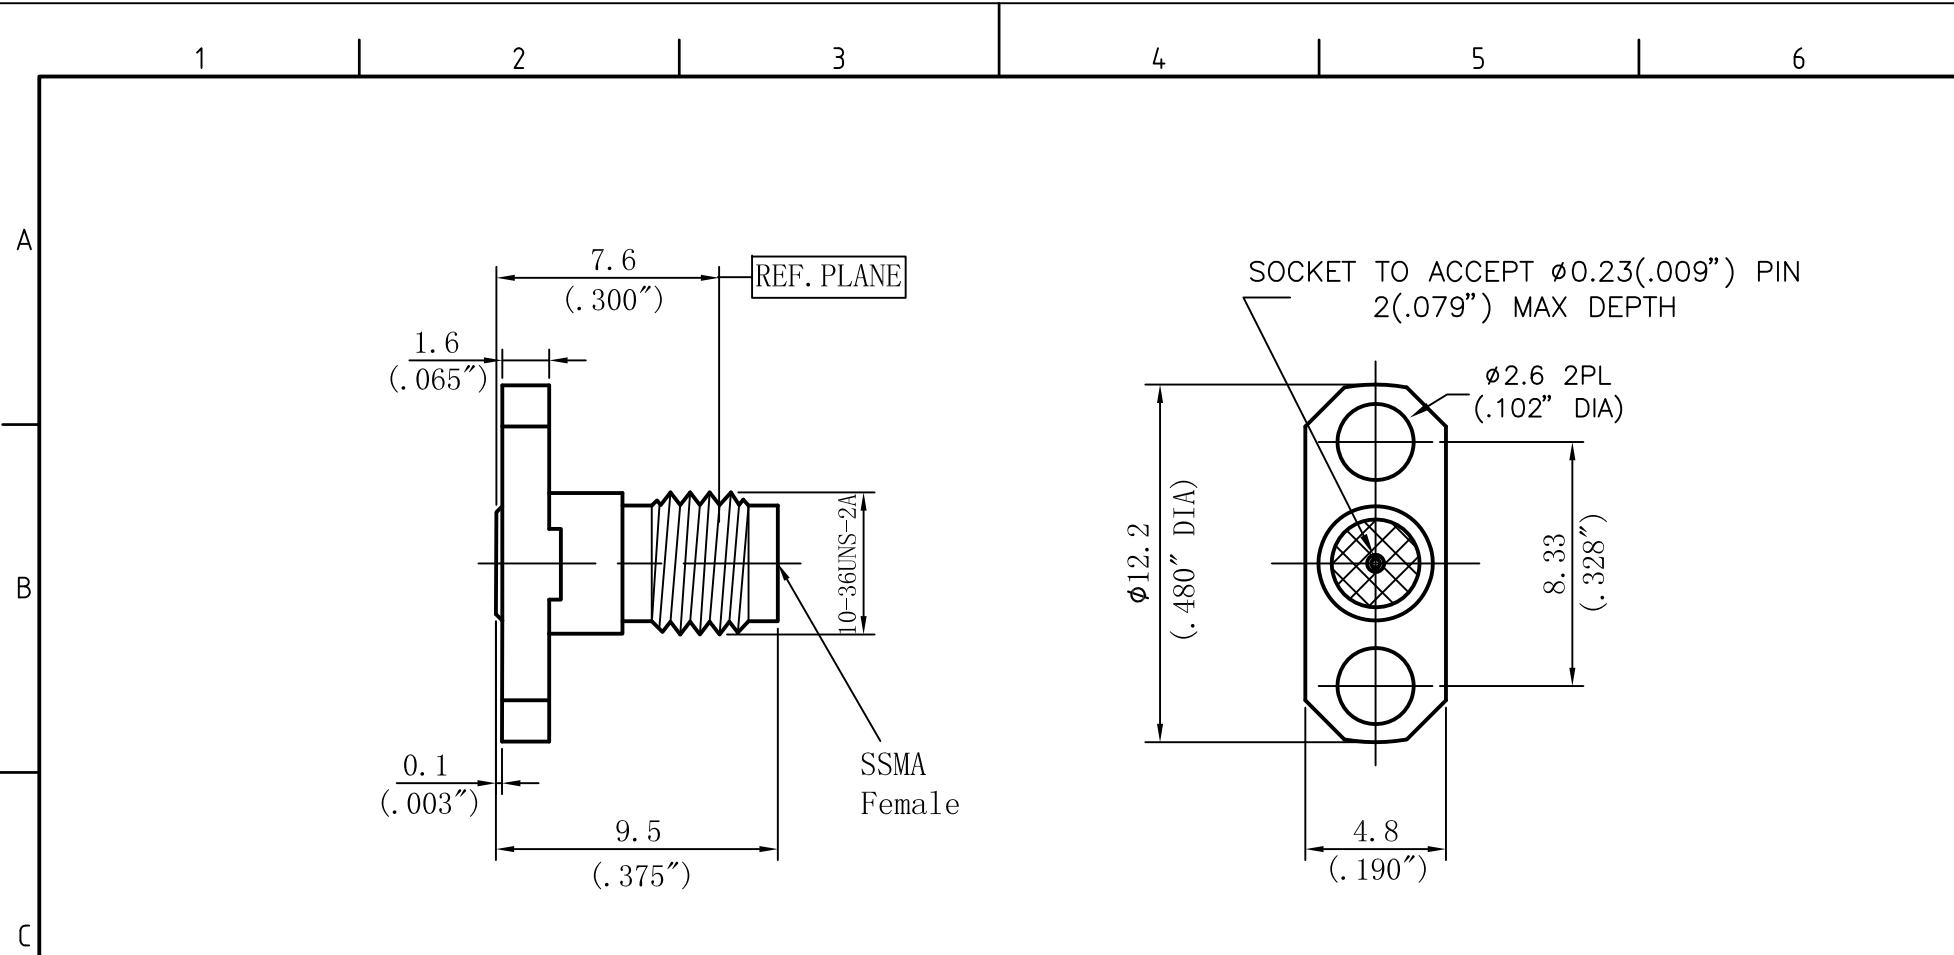

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz.... 1.20:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI

 4th Floor, West Unit, Incubation Building 1 Guanghua Lu, Nanjing TEL:025-84304950 FAX:025-84304959 WWW.ALLWINTEK.COM				DIRECTION OF VIEW 		UNIT mm		TITLE SSMA Connector			
PROPRIETARY INFORMATION: THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.				DRAWN	Rongrong Fang		DWG NO. D570S09F08				
				CHECKED	Haimin Zhang						
				APPR.	Gang Cao						
				UNLESS OTHERWISE SPECIFIED 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX 2. LINEARITY TOLERANCES ± 0.1, ANGLE TOLERANCES $\pm 1^{\circ}$ 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED				OUTLINE DRAWING			
LTR	DESCRIPTION	DATE	APPR.	DO NOT SCALE DRAWING							
								SIZE A4_h	SCALE4: 1	REV. V2.0	SHEET1/1
								5		6	