
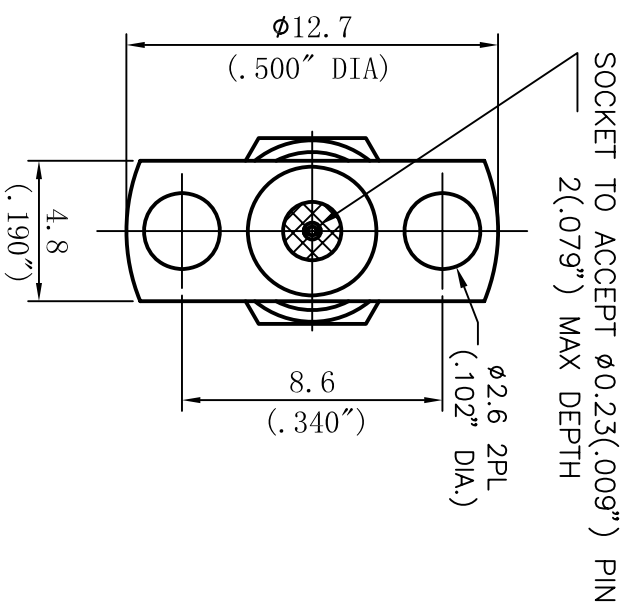


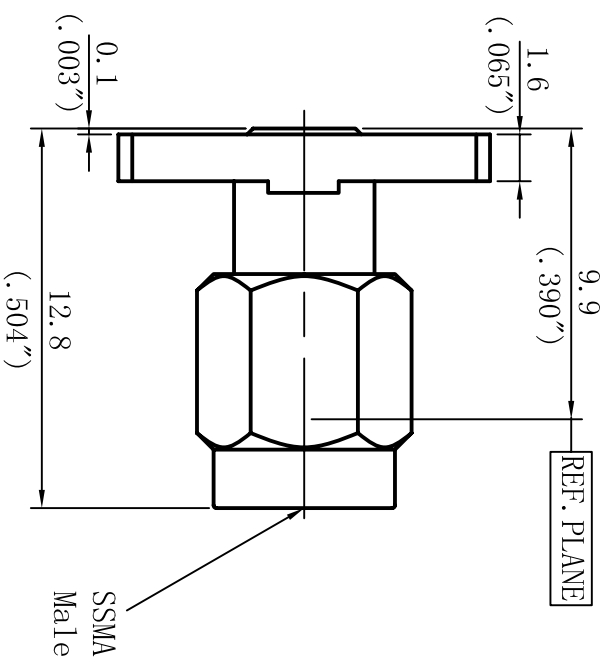

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-27GHz
VSWR: DC-40GHz..... 1.20:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Polished & Passivated
Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN
CHECKED
APPR.

Shaoqing Du
Haimin Zhang
Gang Cao

TITLE
SSMA Connector

DWG NO.
D571S09F07

OUTLINE DRAWING

LTR DESCRIPTION DATE APPR.

DO NOT SCALE DRAWING

SIZE A4-h SCALE: 4:1 REV. V2.0 SHEET 1/1