
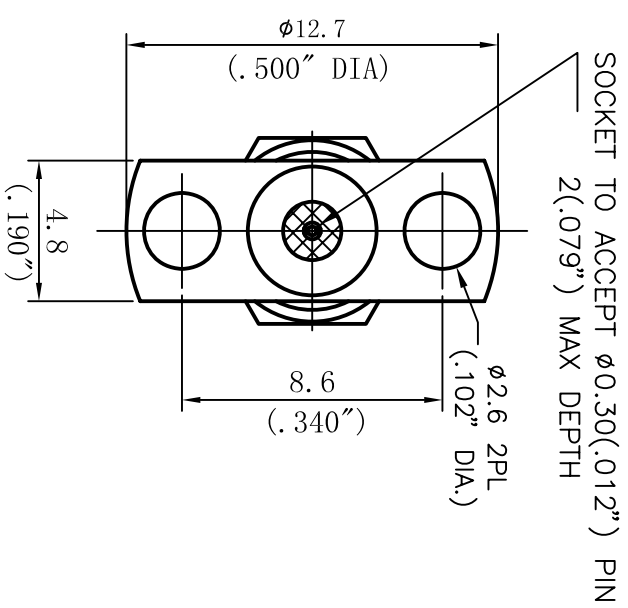


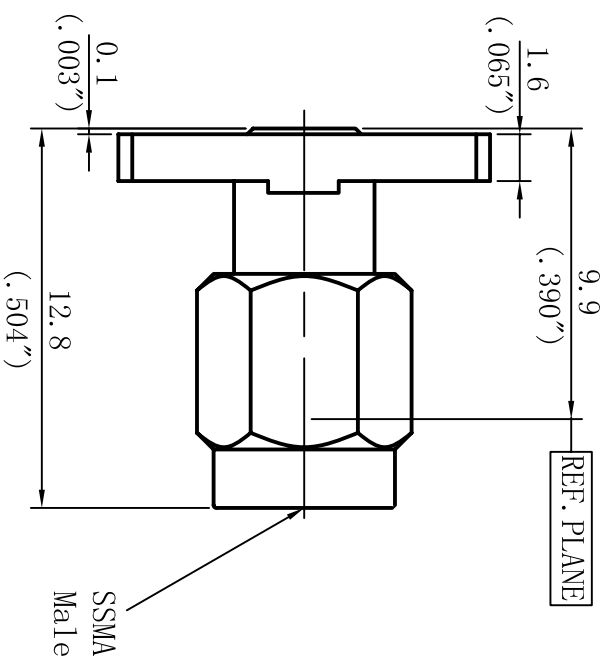

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-27GHz
VSWR: DC-40GHz.... 1.20:1 (Max)

Materials/Finishes:

Housing: SU303F
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL: 025-84304950
FAX: 025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN	Shaoqing Du
CHECKED	Haimin Zhang
APPR.	Gang Cao

1. EXAMINE ALL DIMENSIONS, SPECIFICATIONS, AND TOLERANCES.
2. DIMENSIONS ON CANNOT BE USED TO BE CONSIDERED WITHIN 0.1
3. DIMENSIONS ON CANNOT BE USED TO BE CONSIDERED WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

LTR	DESCRIPTION	DATE	APPR.

TITLE
SSMA Connector

DWG NO.
D571S12F07

OUTLINE DRAWING