
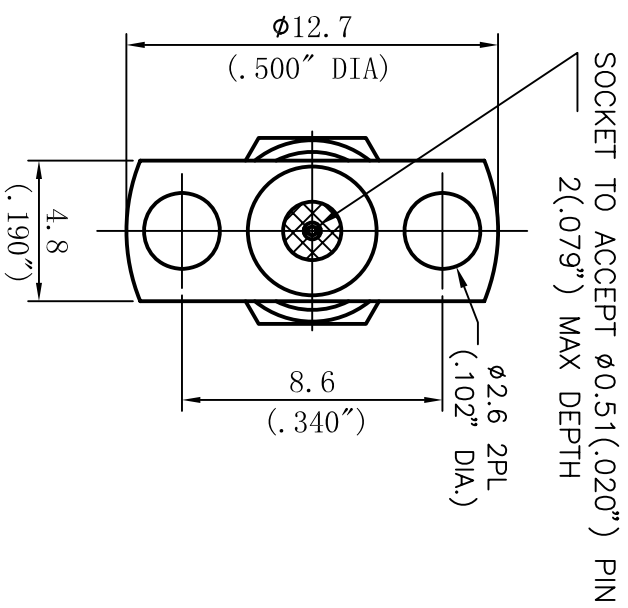


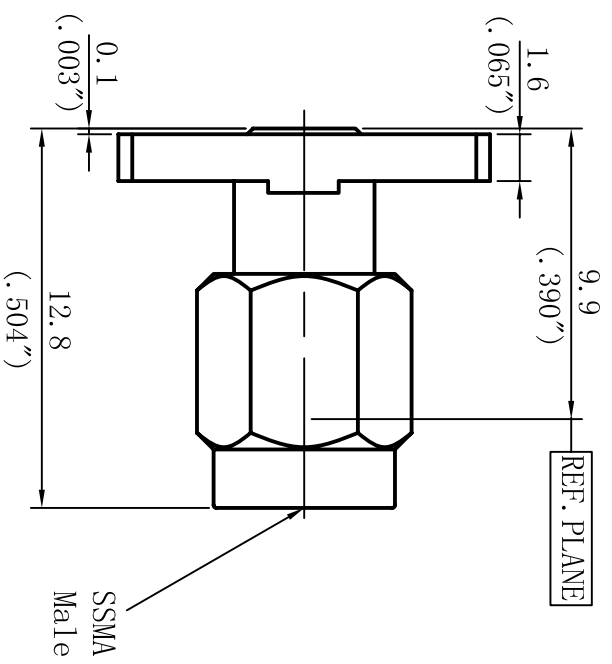

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-27GHz
VSWR: DC-40GHz.... 1.20:1 (Max)

Materials/Finishes:

Housing: SU303F Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators:PTFE&PEI



4th Floor, West Unit,
Incubation Building 1
Ganghua Lu, Nanjing
TEL:025-84304950
FAX:025-84304959
WWW.ALWINTEK.COM

PROPRIETARY INFORMATION. THE INFORMATION WITH THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALWIN TECHNOLOGY.



UNIT
mm

DRAWN	Shaoqing Du
CHECKED	Haimin Zhang
APPR.	Gang Cao

1. EXAMINE ALL DIMENSIONS SPECIFIED.
2. EXAMINE ALL DIMENSIONS SPECIFIED.
3. DIMENSIONS ON CROWN CASTINGS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

LTR DESCRIPTION DATE APPR.

TITLE		SSMA Connector	
DWG NO.		D571S20F07	
OUTLINE DRAWING			

SIZE	A4-h	SCALE	4:1	REV.	V2.0	SHEET	1/1
------	------	-------	-----	------	------	-------	-----