

A

B

C


D

A

B

C

D

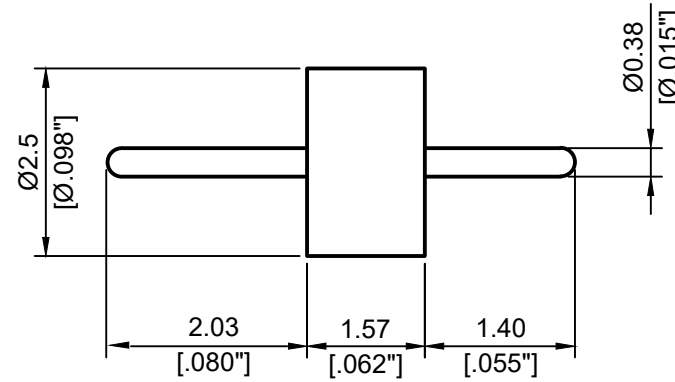

- 1. Pin extensions are ± 0.005 "
- 2. Nominal Impedance: 50Ω
- 3. Frequency Range: DC-28GHz
- 4. $R1 \leq 1.1013 \times 10^{-3} \text{ Pa} \cdot \text{cm}^3/\text{s He}$
- 5. Temperature range: $-55 \sim 400^\circ\text{C}$

 4th Floor, West Unit, Incubation Building 1 Guanghua Lu, Nanjing TEL:025-84304950 FAX:025-84304959 WWW.ALLWINTERK.COM				DIRECTION OF VIEW 		UNIT mm	TITLE GLASS BEAD				
PROPRIETARY INFORMATION: THE INFORMATION WHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.				DRAWN	Haimin Zhang			DWG NO. AL-381420			
				CHECKED	Shaoqin Du						
				APPR.	Dong Wu			OUTLINE DRAWING			
				UNLESS OTHERWISE SPECIFIED 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX 2. LINEARITY TOLERANCES ± 0.2, ANGLE TOLERANCES $\pm 1^\circ$ 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED							
LTR	DESCRIPTION	DATE	APPR.	DO NOT SCALE DRAWING			SIZE A4 a	SCALE 10:1	REV. V2.0	SHEET 1/1	
								5		6	