


A

B

C

D

1. Pin extensions are $\pm 0.005"$
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-46GHz
4. $R1 \leq 1.1013 \times 10^{-3} \text{ Pa} \cdot \text{cm}^3/\text{s He}$
5. Temperature range: $-55 \sim 400^\circ\text{C}$

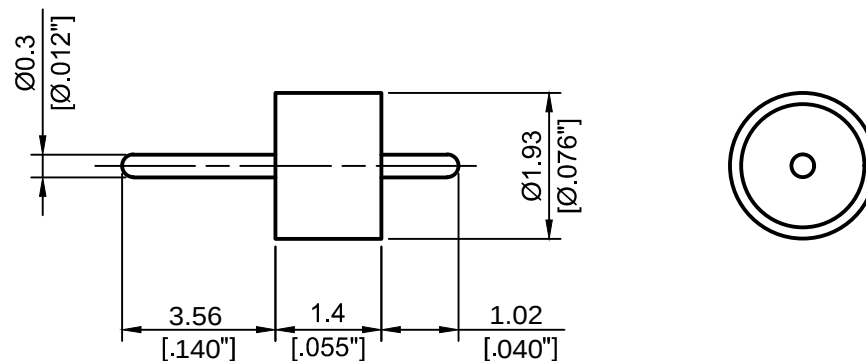

 ALLWIN TECHNOLOGY		4th Floor, West Unit, Incubation Building 1 Guanghua Lu, Nanjing TEL: 025-84304950 FAX: 025-84304959 WWW.ALLWINTeK.COM		DIRECTION OF VIEW 		UNIT mm		TITLE GLASS BEAD							
PROPRIETARY INFORMATION: THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM ALLWIN TECHNOLOGY.				DRAWN		Haimin Zhang		DWG NO. AL-191430-06							
				CHECKED		Shaoqin Du									
				APPR.		Dong Wu									
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX 2. LINEARITY TOLERANCES ± 0.2 , ANGLE TOLERANCES $\pm 1^\circ$ 3. DIAMETERS ON COMBOY CENTERS TO BE CONCENTRIC WITHIN 0.1 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED ✓				OUTLINE DRAWING							
				DO NOT SCALE DRAWING											
LTR		DESCRIPTION		DATE		APPR.		SIZE A4 a		SCALE 10:1		REV. V2.0		SHEET 1/1	

A

B

C

D