

◇ 2.92mm-SMA 转接器 (DC~27GHz)

主要性能指标

特性阻抗: 50 Ω

频率范围: DC-27GHz

连接器耐久性: 500次

温度范围: -55℃~+165℃


材料/表面处理

壳体: 不锈钢SU303 抛光/钝化


中心导体: 镀青铜 镀金(符合MIL-G-45204)

绝缘体: PEI&PTFE


2.92mm/SMA界面符合MIL-STD-348A

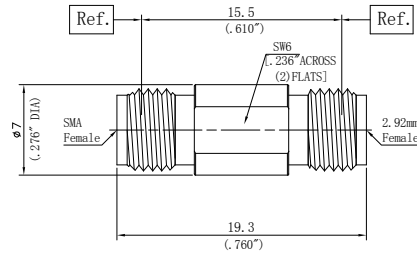


描述	2.92mm (f) to SMA (f)
型号	Z365500Z01
VSWR	DC-27GHz . . . 1.15:1 (max)

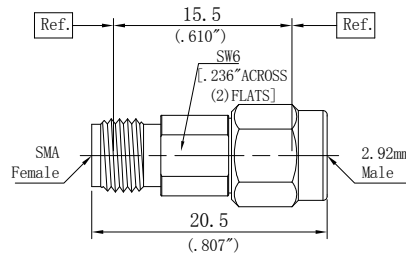

描述	2.92mm (m) to SMA (f)
型号	Z365510Z01
VSWR	DC-27GHz . . . 1.15:1 (max)

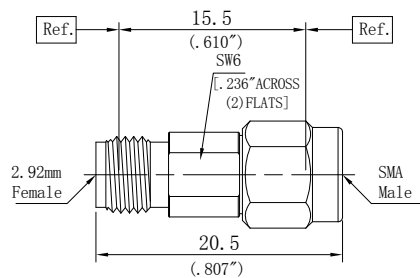

描述	2.92mm (f) to SMA (m)
型号	Z365501Z01
VSWR	DC-27GHz . . . 1.15:1 (max)

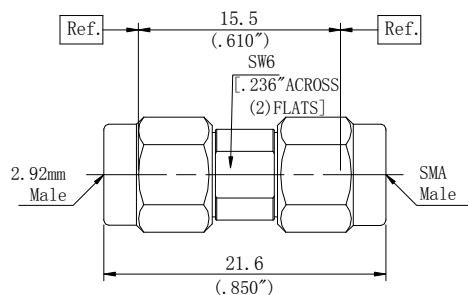

描述	2.92mm (m) to SMA (m)
型号	Z365511Z01
VSWR	DC-27GHz . . . 1.15:1 (max)